



(FIG 1)
PSD12

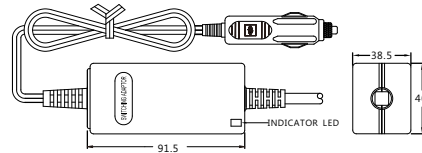

(FIG 2)
PSD25

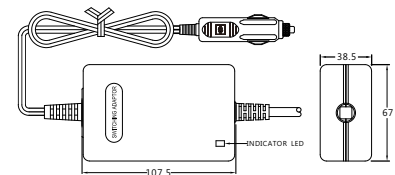

(FIG 3)
PSD40/PSD60

■ **PSD12** 12W DC TO DC series (FIG 1)

Model name	Input Voltage(VDC)	Output Voltage(VDC)	Output Current(A)	Max.Output power(W)
PSD12-1	11~26	3~6	2.40~2.00	12
PSD12-1-1	11~26	6~8	2.00~1.50	12
PSD12-2	11~26	8~10	1.50~1.20	12
PSD12-4	12	13~16	0.61~0.50	8
PSD12-5	11~15	16~21	0.50~0.38	8
PSD12-6	11~15	21~27	0.38~0.29	8
PSD12-7	11~15	27~33	0.29~0.24	8
PSD12-8	11~15	33~48	0.24~0.16	8

Weight: Approx 70~100gs

■ **PSD40** 12W DC TO DC series (FIG 3)

Model name	Input Voltage(VDC)	Output Voltage(VDC)	Output Current(A)	Max.Output power(W)
PSD40-1	11~26	5~6	5.00~4.10	25
PSD40-1-1	11~26	6~8	5.00~3.70	30
PSD40-2	11~26	8~11	4.30~3.10	35
PSD40-4	12	13~16	2.90~2.30	38
PSD40-5	11~15	16~21	2.50~1.90	40
PSD40-6	11~15	21~27	1.60~1.40	40
PSD40-7	11~15	27~33	1.40~1.20	40
PSD40-8	11~15	33~48	1.20~0.80	40

Weight: Approx 200~250gs

■ **PSD25** 25W DC TO DC series (FIG 2)

Model name	Input Voltage(VDC)	Output Voltage(VDC)	Output Current(A)	Max.Output power(W)
PSD25-1	11~26	5~6	3.60~3.00	18
PSD25-1-1	11~26	6~8	3.00~2.20	18
PSD25-2	11~26	8~11	2.50~1.80	20
PSD25-4	12	13~16	1.50~1.20	20
PSD25-5	11~15	16~21	1.20~0.90	20
PSD25-6	11~15	21~27	1.10~0.90	25
PSD25-7	11~15	27~33	0.90~0.70	25
PSD25-8	11~15	33~48	0.70~0.50	25

Weight: Approx 200~250gs

Note:Optional output connectors (See appendix A)

■ **PSD60** 60W DC TO DC series (FIG 3)

Model name	Input Voltage(VDC)	Output Voltage(VDC)	Output Current(A)	Max.Output power(W)
PSD60-5	11~15	18~21	3.34~2.86	60
PSD60-6	11~15	21~27	2.86~2.22	60
PSD60-7	11~15	27~33	2.22~1.81	60

Weight: Approx 200~250gs