



One Audio Digital Limited


TEL: +86- 755-29553043 FAX: +86-755-29553046
 E-mail: joannawang@oneaudiodigital.com
 Skype:oneaudiosales5
 Website: http://www.oneaudiodigital.com

DSR1201 Sat Finder

Highlight

Private design Hand-hold satellite finder	Support DVB-S/S2 signal demodulation
Support Spectrum analyzer	128x64 B/W display and blue color backlight
Sound alarm when lock signal	Automatic calculate angle:AZ,EL
Multi-OSD language Support	Can import satellite list and TP list by PC

UI

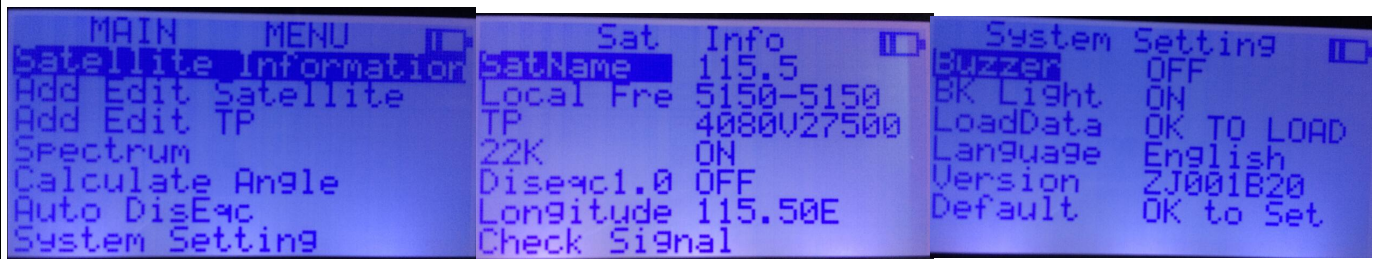

FEATURES

- λ Satellite and TP editable by PC and update by PC
- λ Built-In light & electric buzzer
- λ BER, S/N (MER)
- λ Real-time and multi-Analyzing Spectrum
- λ Support DISEqC1.0, DISEqC1.1 and 1.2
- λ Support 22K control
- λ Built in rechargeable battery
- λ -75Ω connector

Product Specification

Tuner (AV2012)	Tuner	DVB-S/S2
	Demodulation	QPSK, 8PSK, 16APSK, 32APSK
	Input Frequency:	950MHz--2150MHz
	Input level:	-80~-20 dBm
	Input impedance	75 Ω
Screen	Size	3 Inch Screen
	Button	USB 2.0 Port for Multimedia Player and Software Upgrade
Panel	ANT IN	Receives the Signal from Satellite Antenna
	Button	Menu/LEFT/RIGHT/UP/DOWN/OK/RETURN
	Power switch	ON/OFF
	RS232	RS232 cable for software upgrade
	DC Power	EXTERNAL POWER
Processor	CPU	STM32+ GX1132
	Flash Memory	4MB
Power	DC input Range	12V / 1A
	Battery Capacity	1700MA/H
physics Specification	Dimension(WxDxH)	178.9X81.9X35.4mm
	Weight	0.65kg
	Carton box size	495*233*398mm
	Gift box size	236*110*75mm
	Operating Temp.	-20~50°
Accessories	User Manual /adapter/AV Cable/CD disk/compass (option)	