




X3CS04
Smart Controller Switch User Manual

Introduction

The Smart Controller Switch is a portable and movable scene switch panel that is battery powered. easy to install and easy to use. It has four buttons. each button can be associated with a switch device in one or more systems.


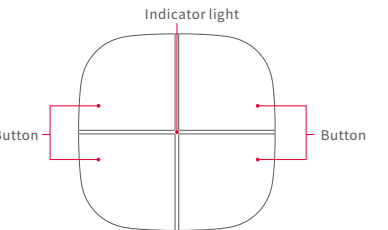


Installation method

1.Fix the pedestal hanging plate on the wall or on the table. It can be punched or glued.



2.Rotating the battery cover of the central control switch to remove the battery. then buckle it back and screw it on the hanging plate.

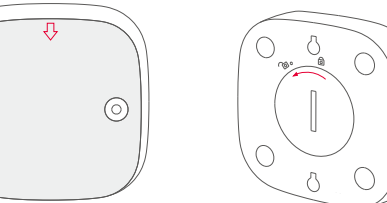

Join the gateway

* **The gateway needs to be online when configuring the network. Please follow the instructions of the intelligent gateway.**

1.Power on

Open the battery cover and load a CR3032 battery

2.Open the gateway to allow new devices to join in.

Open XHYSparxSmartX3 . log in the gateway. open the gateway according to the guidelines. allow to join and add devices.

3.Make the central control switch enter the networking mode.

Press and hold any button for 6s. the red indicator will flash alternately twice. and enter the networking mode.

* **The central control switch indicator flashes twice alternately and will automatically join the gateway within 1 minute and display on the APP. After the device is successfully added. the APP sets the scene or device associated with each button.**

Indicator Description:

This product is equipped with a green indicator light, the working status is as follows:

Working status	Indicator status	Note
Power on	lighting 1s then light off	
Removing	1Hz Flashes 2times	Long press any button for 6 seconds
Adding network	After add network Successfully, 1Hz flashes 2 times.	Before adding network, short press any button for adding network.
Press any switch key	1Hz flashes 1time successful	

Basic Parameters:

Power supply: 3V CR3032
Operating temperature: -10 ~ +50°C
Working humidity: 0 ~ 95%RH, Non-condensing
Wireless connection: ZigBee
Wireless distance: ≤30m (open area)

Contact us

Shenzhen Xinghuoyuan Intelligence Technology Co., Ltd.
Add: 8F, Block south, Yuanxing Bld., North Hi-Tech Park, Nanshan district, Shenzhen, Guangdong Province, China 518057
Tel: 0755-86560088
Email: support@xinghuoyuan.com
Website:www.xhycloud.com