

Model no.: WRS-365SH-12190




Main applications:

1. Personal care: Hair dryer, Massager;
2. Home appliances: Popcorn machines, sweeping robots.
3. Automotive system: gear shift control.


WRS-365SH-2170

DC18.0V

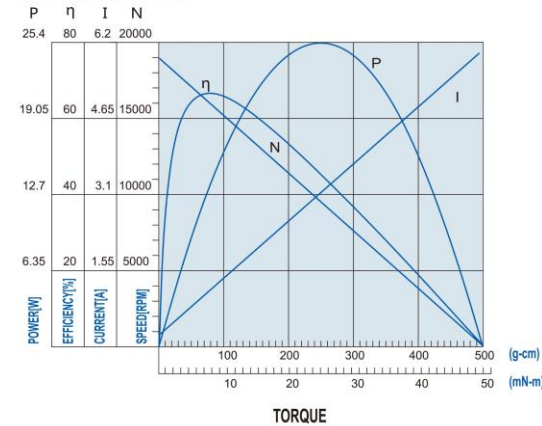


WRS-365SH-14134

DC24.0V

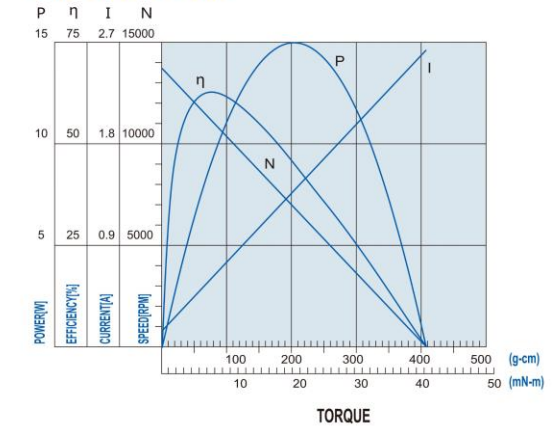

Dimensions

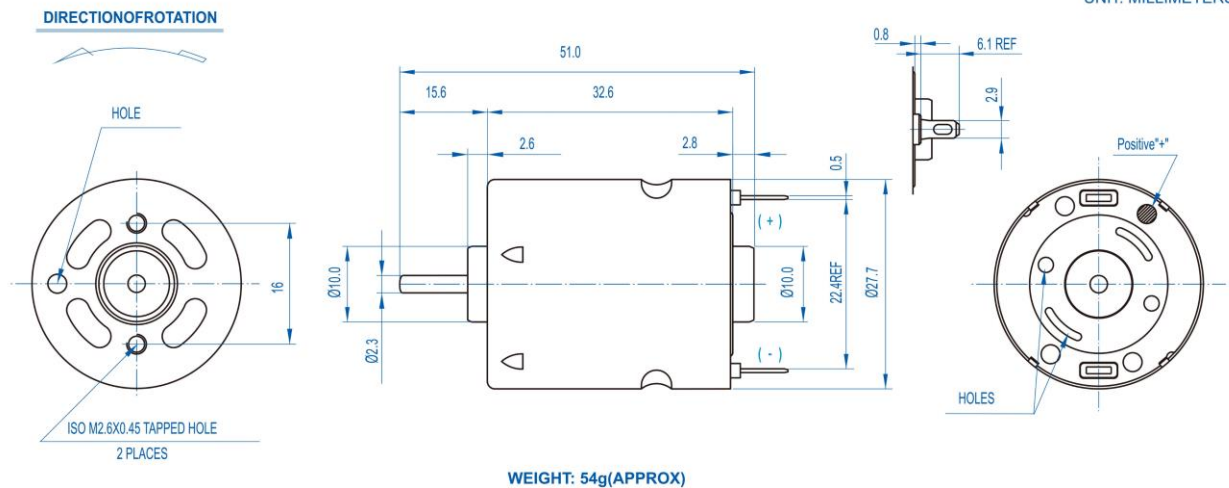

Nominal voltage: DC24V
Operating range: DV6.8V-36V
No load current: 0.08A
No load speed: 10500rpm/min.
Current at load: 0.33A
Speed at load: 8400rpm/min.
Max efficient power: 4.39W
Starting torque: 25.5mN.m
Starting current: 1.32A
Out put: approx. 1.0W-40W