





深圳易凯达科技有限公司
永嘉达科技有限公司（香港）
WIN-KARE TECHNOLOGY CO.,LTD

Rotary Dimmer

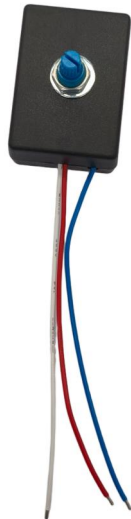

Model:WK-1100I
Input Voltage:220-240Vac,50/60Hz
Rated Loading:Max.100w Ta=45°C
Over heat protect
Dimmable life:min.10000
Dimmable way: Rotary
Hi-Pot 4KVac
Fire prevention PC case
Size:48.5*35*20mm

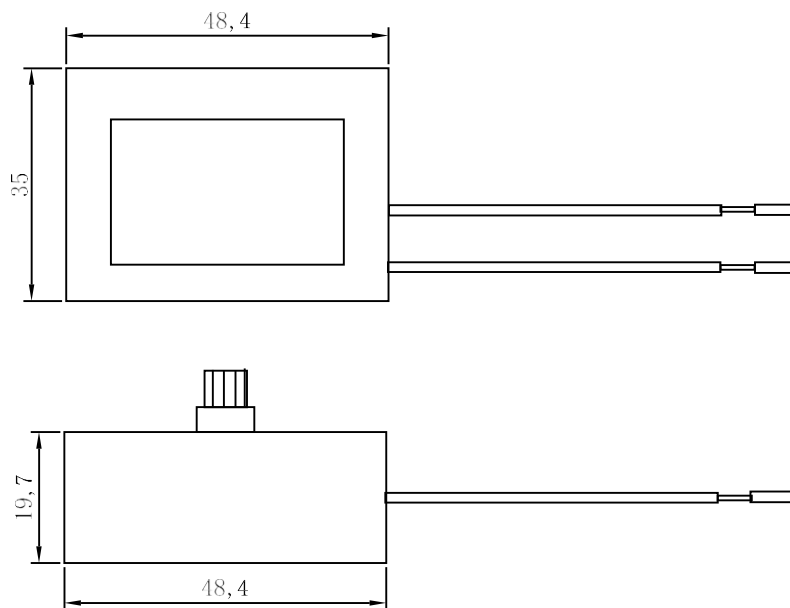


Tel:+86-755-25003073;Fax:+86-755-25003079
Http:\\www.win-kare.com; Mail:service@win-kare.com



深圳易凯达科技有限公司
永嘉达科技有限公司（香港）
WIN-KARE TECHNOLOGY CO.,LTD

Rotary Dimmer

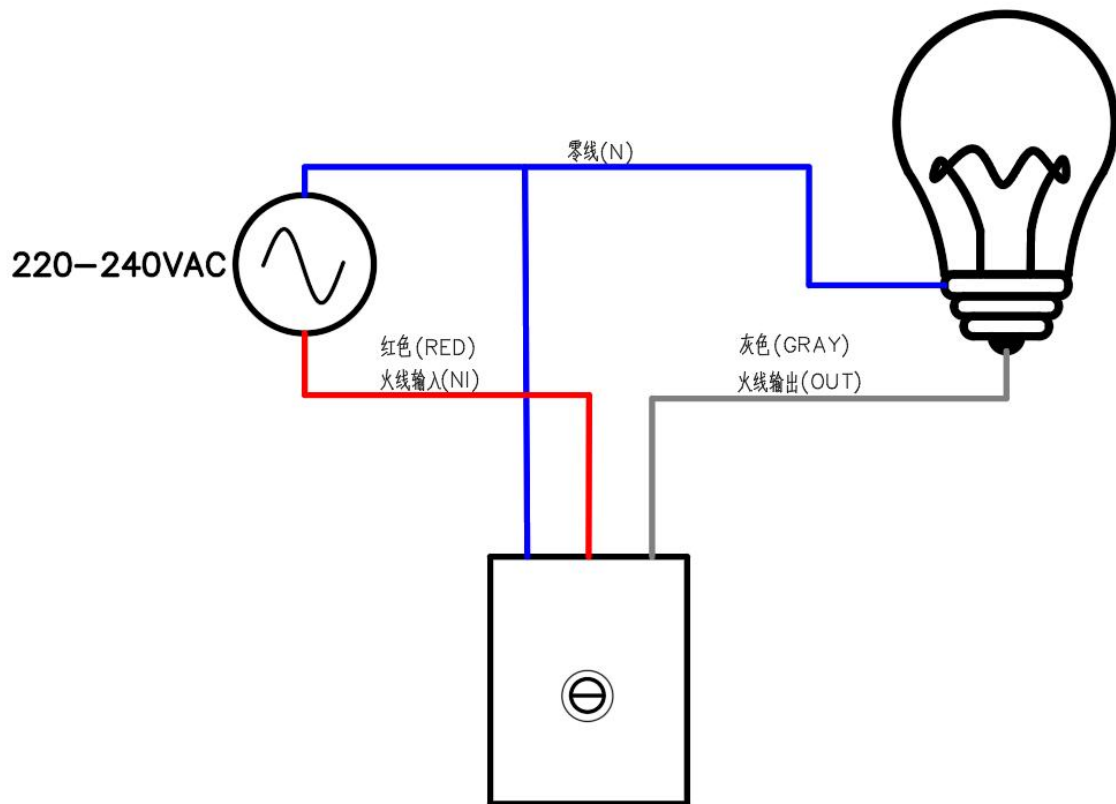

Tel:+86-755-25003073;Fax:+86-755-25003079
Http:\\www.win-kare.com; Mail:service@win-kare.com