



WIN-KARE TECHNOLOGY CO.,LTD

Tel:+86-755-25003073;Fax:+86-755-25003079;

Mail:marketing@win-kare.com;Http://www.win-kare.com

Specification

LED inline Rotary Dimmer

Model:WK-LR0-30V-1 (恒流)

LED in-line Rotary Dimmer switch is a kind of controller which can adjust the brightness by rotary the switch

Technical parameters

1, Operating Temperature: -20~60℃

2, Input voltage:9-30V;

3, Input current : Max 2A




4,Output current : Max 2A

5,Output voltage :DC9-30V

6,Size: 80*35.5*33.6 (mm)

7, Dimmer way:PWM,0-100%

8,Output power:60W

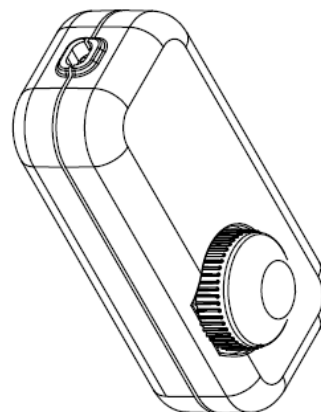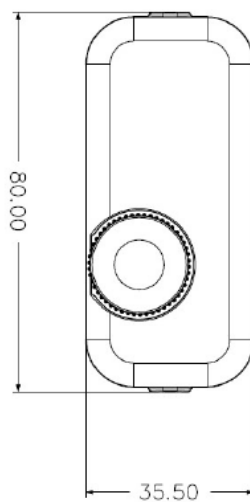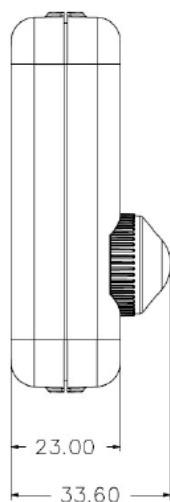

WIN-KARE TECHNOLOGY CO.,LTD

Tel: 0755-25003073; 0755-25003075 Fax: 0755-25003079

Http://www.win-kare.com Mail:service@win-kare.com