



# ZMPT107 potential transformer

Small size, high accuracy, consistency, for power measurement

Structural parameters:



Front view

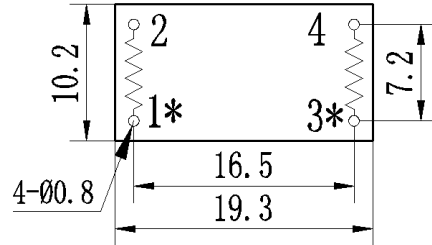

Bottom view

Technical parameters:

	ZMPT107
Rated input current	2mA
Rated output current	2mA
Ratio	1000:1000
Phase difference	$\leq 30'$ ( $50\Omega$ )
Linear range	0~3mA ( $50\Omega$ )
Linearity	0.1%
Accuracy class	0.2
Isolation voltage	3000V
Uses	measurement
Sealing material	epoxy
Installation	PCB
Operating temperature	-40°C~+70°C

Use of illustration:

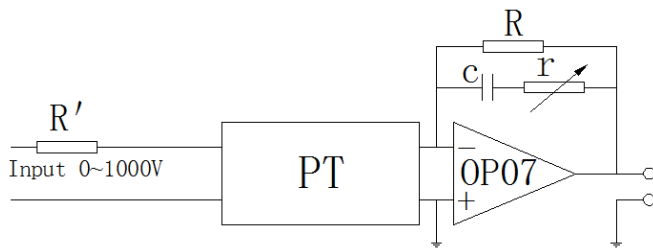


Figure 1

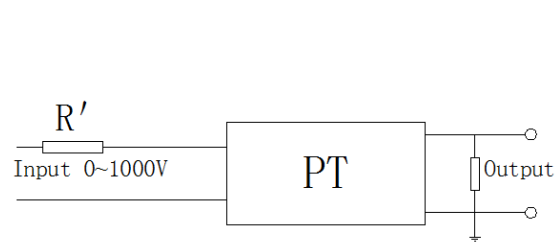


Figure 2