

AKMic

Wireless Microphone For Live Streaming



CRYSTAL CLEAR
SOUND QUALITY



USB-C, iOS®
AUDIO OUTPUT



BUILT-IN
MICROPHONE

AKMic is a premium lavalier wireless microphone set including a transmitter and a receiver which is ideal for the most demanding audio and video applications.


AKMic features a unique design with a flat capsule that is incredibly discreet.

The mounting clip is also extremely compact, making AKMic much easier to conceal than standard lavaliers.

Besides, it has an excellent frequency response that flatters all voice types, with an omnidirectional polar pattern that picks up crystal-clear, detailed audio from all directions.



- Premium lavalier microphone, wide compatibility with smartphones, tablets, PCs
- Easy Plug & play, auto-pairing, no app is needed
- Voice sync without delay, auto-sync real-time technology
- Excellent noise cancellation records optimum acoustics by its intelligent noise reduction technology
- The omnidirectional microphone picks up crystal-clear, detailed audio from all directions
- Works up to 8 hours per one full charge
- Compact mounting clip for extra convenience
- 65 feet operation range, no annoyance of cables

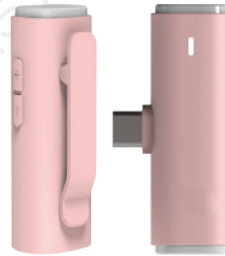

ACOUSTIC & ELECTRICAL SPECIFICATIONS

Polar Pattern:	Omnidirectional
Frequency Response:	20Hz-20kHz
Sampling Rates:	48kHz
Bit depth:	16 bits
Signal-to-noise ratio:	≥75dB
Sensitivity:	-42dB±3dB
Distortion:	<0.1%
Operating Time:	Up to 8 hours
Charging Time:	1.5 hours
Transmission Range:	20m (line of sight)
Charging Port:	USB Type-C
Colors:	○ ● ● ●

MECHANICAL SPECIFICATIONS

Weight (grams):	TX: 12g	RX: 8g
Dimensions (millimetres):	TX	RX
Length:	20.0	26.7
Width:	20.5	12.0
Height:	54.0	56.0

Included Accessories: 1*Fur Windshield
1*USB-C Cable
1*Carrying Pouch
1*USB-C Dust Cover



Receiver

Transmitter



USB-C cable



Carrying Pouch



Dust Cover




Windshield



Manual


Receiver (RX)



- ① USB-C connector
- ② USB-C to lightning adapter (Optional)
- ③ LED indicator
- ④ MFB button (Pairing/Power off)
- ⑤ USB-C charging port

Transmitter (TX)

- ① LED indicator
- ② Metal clip
- ③ MFB button (Power/Mute/Pairing)
- ④ Volume up
- ⑤ Volume down
- ⑥ USB-C charging port
- ⑦ Built-in microphone

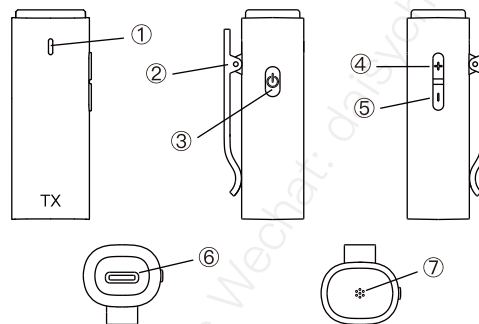

AK AUDIO®

AVLink Industrial Co., Ltd | Shenzhen AKAudio Co., Ltd

Add: Shuichanjiangwan Industrial 1st Park, Gushu, Xixiang, Bao'an, Shenzhen, 518126, China

Email: sales02@avlink.cc Wechat: daisychen0726 Skype: daisy-avlink

T: +86 755 29305259-613 | +86 15013592667

www.theakaudio.com

Please Feel Free to Reach Out if You Have Any Questions.