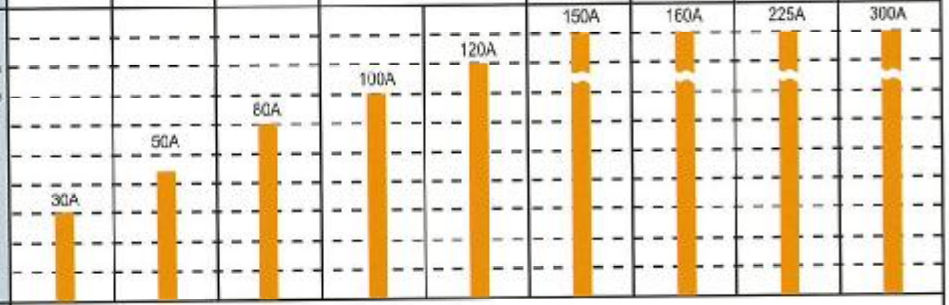


S. C. R. Unit (1 Fuse use)

Model No.	MAPS								
	—	—	—	—	—	—	—	—	—
	0304	0504	0804	1004	1204	1504	1604	2254	3004
Dimensions (Unit: mm)									
Load Current Rating (A)									
Load Voltage (V)	—								
To Take Pressure	100~500V								
Ambient Temp.	—								
RH	Operating: 0~50°C, Storage: -10~70°C								
Auxiliary Power	0~90%								
Min Load Current	—								
Off State Leakage Current	0.6A								
Power Consumption	—								
Frequency Range	—								
Control Type (Input) 0~20mA	—								
Control Type (Input) 4~20mA	•								
Control Type (Input) 0~5V	—								
Control Type (Input) 1~5V	—								
Control Type (Input) 0~10V	—								
Control Type (Input) 2~10V	—								
Strength of Press-resisted	2500 VAC / 1 Min between power & external cover								
	1000 VAC / 1 Min between power & input signal								
Isolation Resistance	Over 20 MΩ (power & external cover)								
	Over 20 MΩ (input signal & external cover)								
Alarm	—								
Notation	Single phase 1 pole								
Net Weight (g) (Include heat sink)	Approx. 300	Approx. 500	Approx. 950	Approx. 1200		Approx. 1300	Approx. 1500	Approx. 1800	Approx. 2000
Features	1. Single phase 1 pole with alarm function. 2. Small size and simple structure for easy use. 3. 4~20mA can drive thyristor directly, auxiliary power supply is not necessary to make easy wire connection and maintenance. 4. Input signal 4~20mA available only. 5. Free voltage from 100~500VAC. 6. CE Approval.								

PDF 檔案以 "pdfFactory Pro" 試用版建立 www.pdffactory.com