


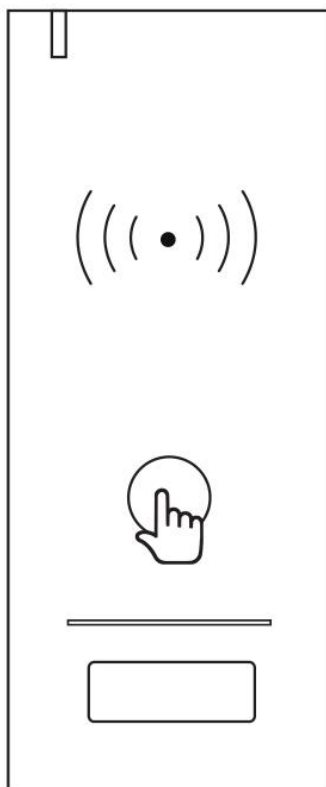

WR1

The wireless Reader Kit includes a Wireless Reader and a Receiver. 433MHz Rolling Code of encryption algorithm guarantees higher-secure, programmable Wiegand output of the Receiver makes it can work with most Wiegand controller in the world. Super strong 3M stickers provide a simple way for installing the Wireless Reader.

Because of ultra low power consumption, the battery of Wireless Reader can work as long as 6 months.

(bases on 30 times/day)


Features:

- > 433MHz Rolling Code technology
- > Card type: 13.56MHz Mifare card
- > Programmable Wiegand output of the
- > Receiver: 26 bits or 34 bits
- > Communication distance: 30m maximum
- > Ultra low power consumption
- > Waterproof, conforms to IP65

Specifications:


Wireless Reader	Card Type	13.56MHz Mifare card
	Operating Voltage	3 units of AAA batteries
	Idle Current	≤5uA
	Working Current	≤35mA
	Reading Distance	≤3cm
	Communication Frequency	433MHz
	Communication Distance	30m Maximum
	Operating Temperature	-20'C ~ +60'C (-4'F ~ +140'F)
	Operating Humidity	0% ~ 86%
	Index of Protection	IP65
	Color	Black, White optional
	Dimensions	L120 * W50 * H20(mm)
	Net Weight	88g
Receiver	Operating Voltage	12V DC
	Working Current	≤15mA
	Communication Frequency	433MHz
	Wiegand Output Format	26 bits Or 34 bits (Default is 26 bits)
	Operating Temperature	-20'C ~ +60'C (-4'F ~ +140'F)
	Operating Humidity	0% ~ 86%
	Dimensions	L25 * W50(mm)
	Net Weight	10g

Product Size

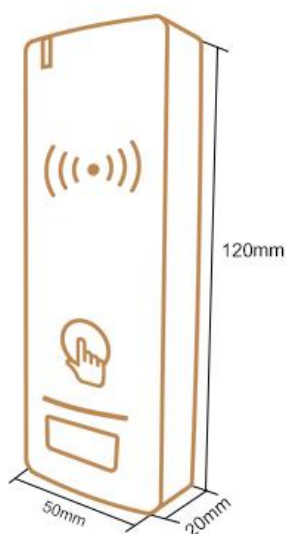

Gift Box Size



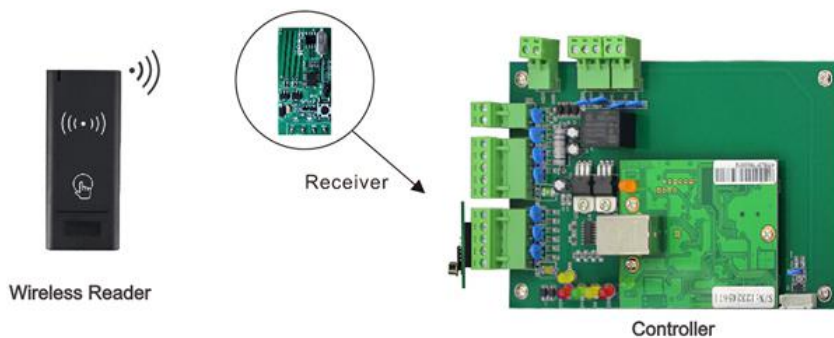

Can work with any wiegand controller



Battery powered, no need wires any more!



Fast installation within 2 minutes



Carton Inventory

