

Model no.: WRS-555SH-3250




Main applications:

1. OA equipment: printer, Computer peripheral equipment;
2. Automotive products: car antenna, car seats with lumbar support.


WRS-555SH-2670

DC24.0V

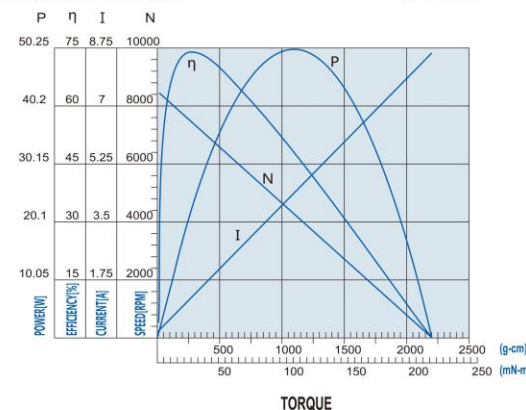


WRS-555SH-19160

DC15.0V

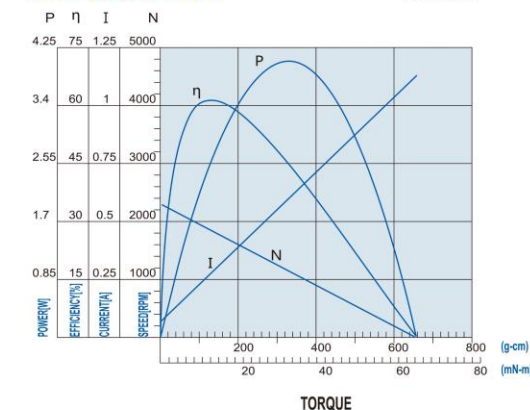

Dimensions

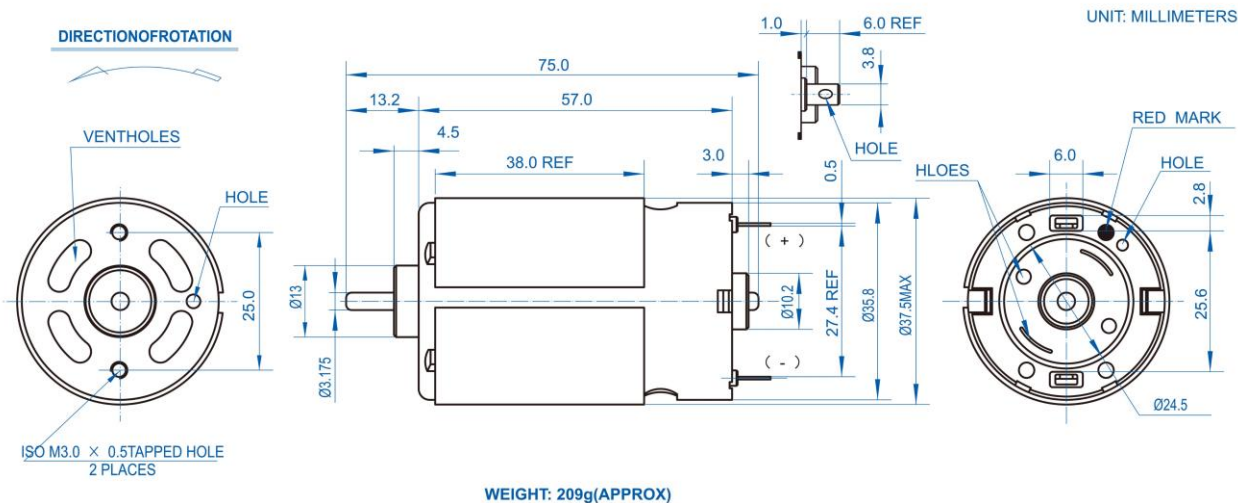

Nominal voltage: DC12V
Operating range: DC9.6V-30V
No load current: 0.24A
No load speed: 6100rpm/min
Current with load: 1.49A
Speed with load: 5300rpm/min
Max efficient power: 12.4W
Starting torque: 162mN.m
Starting current: 9.2A
Output: 3.0W-65W