



东汇电机

DONG HUI MOTOR

贵金属刷电机

Precious metal-brush motors

DRF-520


主要用途: 电磁炉、警铃

Typical Applications: Induction Cooker

Alarm Bell



DIRECTION OF ROTATION

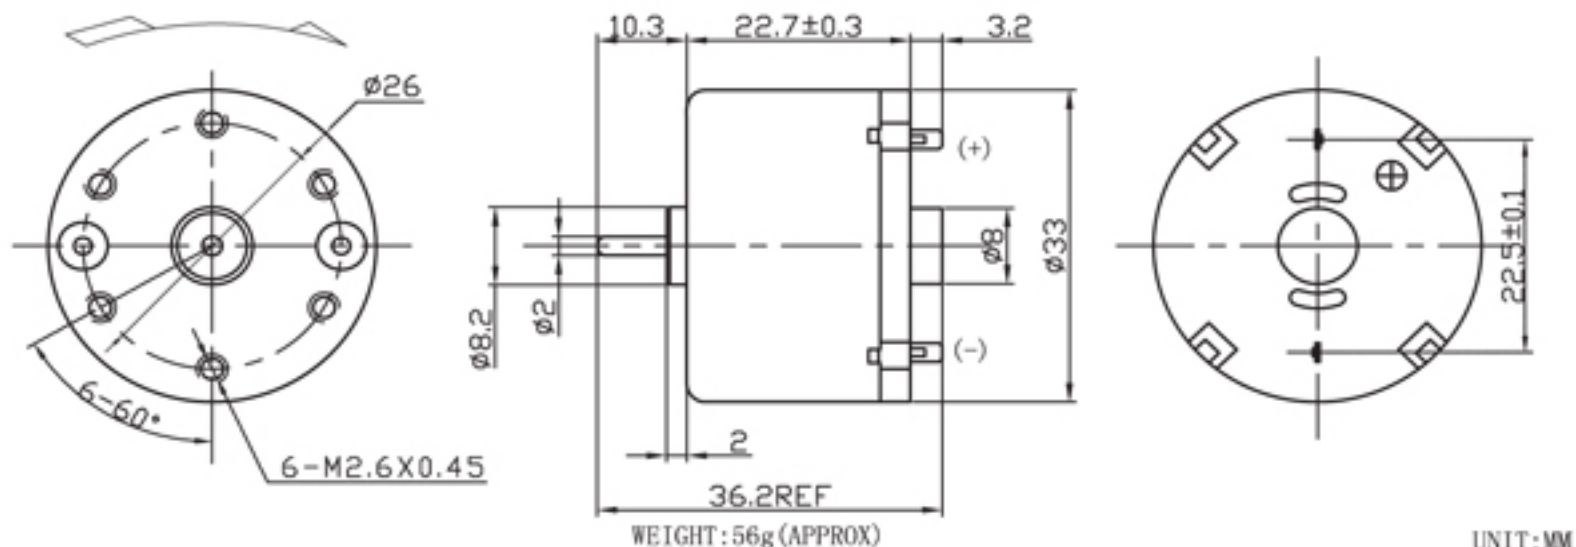

型 号 MODEL	电压 VOLTAGE		空载 NO LOAD		最大效率 AT MAXIMUM EFFICIENCY					堵转 STALL	
	使用范围	额定值	转速	电流	转速	电流	扭矩	输出功率	效率	扭矩	电流
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUT PUT	EFF	TORQUE	CURRENT
	V	V	r/min	A	r/min	A	g. cm	W	%	g. cm	A
DRF-520CA-17410	9.0~15.0	12.0	5500	0.037	4565	0.21	33.0	1.55	62.2	194	1.05
DRF-520CA-10900	20.0~28.0	24.0	3100	0.007	2600	0.02	10.0	0.267	55.6	62.1	0.088

