



**Buttonless Smart Touch LED Desk Lamp(R100)**



**Technical Parameters**

Model	R100
Power	10W
Light Source	96Pcs LED SMD2835
CCT	2700-6500K (Color Changing)
CRI	90Ra
Dimming Mode	Stepless Dimming Control
Center Luminance	≥1200Lux
Adaptor Specification	Input:AC100-240V; Output: DC12V, 1A
Lamp Color	Black/White
Materials	Aluminum+ABS+PS
Warranty	2 Year
Product Size	L567* W200*H434

**Main features:**

- ★ Buttonless smart touch control
- ★ Extra large light-emitting panel
- ★ Multi-angle rotatable design
- ★ Stepless dimming control
- ★ CCT Adjustable from 2700-6500K
- ★ Edge-Lit, Soft and uniform light
- ★ Eye-care, Flicker-free, No glaring
- ★ Vibration alert for brightness and CCT
- ★ Double memory of brightness and CCT
- ★ Detachable sturdy metal base or clamp

Factory address: 5/F, 5th Building, Dong Long Xing High-Tech Park, Dalang Sub-district, Longhua New District, Shenzhen, 518109, China.

Tel: +86-755-89584196

Contact: Toby Ding

Email: toby@flashinelighting.com

Fax: +86-755-89584197

Mob: +86-135 3818 3534

Web: www.flashinelighting.com



# Shenzhen Flashine Lighting Co., Ltd.

## Application:

Used in business offices, study rooms, bedrooms, living rooms, etc.

## Packing details:

Packed by neutral color box

Net weight: 3.25Kg/Pcs

Box size: L210\*W148\*H405mm

Quantity: 6Pcs/Carton

Gross Weight: 21Kg/Carton


CTN Size: L460\*W440\*H425mm



## Warm Tips:

How to use:

1. Turn on/off: Double-click this lamp arm.
  2. Brightness control: Put your finger on this lamp arm to increase/decrease the brightness, it will vibrate slightly when reaching max/min value.
  3. Color temperature: Click this lamp arm and then put your finger on it to change the color, it will vibrate slightly when reaching max/min value.
- Follow the above steps to operate on any position of this lamp arm.

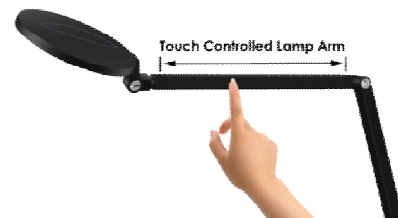

---

Factory address: 5/F, 5th Building, Dong Long Xing High-Tech Park, Dalang Sub-district, Longhua New District, Shenzhen, 518109, China.

Tel: +86-755-89584196

Contact: Toby Ding

Email: toby@flashinelighting.com

Fax: +86-755-89584197

Mob: +86-135 3818 3534

Web: [www.flashinelighting.com](http://www.flashinelighting.com)