


Model no.: WRS-360SA-12500




Nominal voltage: DC24V
 Operating range: DC18V-30V
 No load current: 0.05A
 No load speed: 6744rpm/min
 Current with load: 0.22A
 Speed with load: 5408rpm/min
 Power at max efficiency: 3.29W
 Starting torque: 28.1 mN.m
 Starting current: 0.9A
 Output: 1.0W-40W

WRS-360SA-12500

DC24.0V

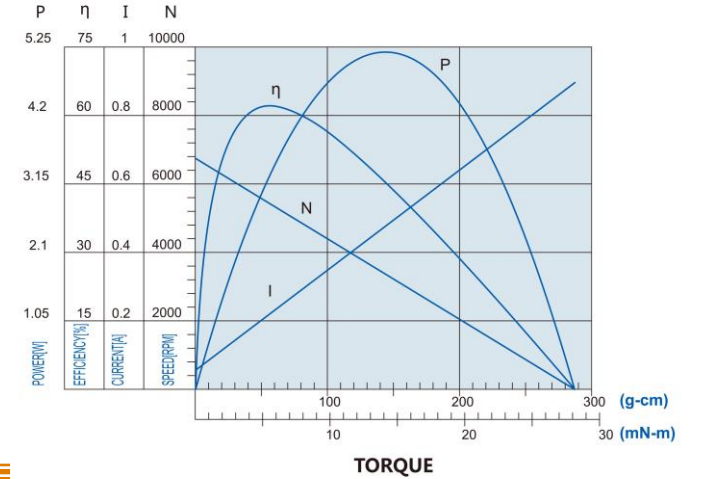

Dimensions

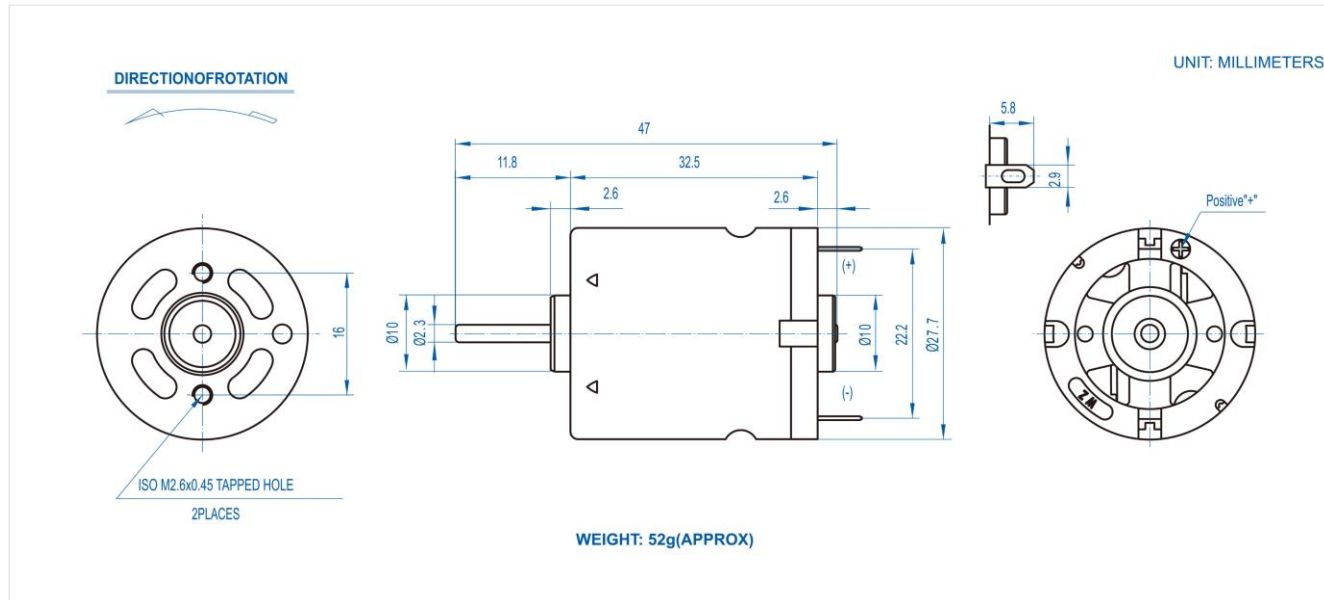

Main applications:

1. Robot: Sweeping robots;
2. Household appliances: Massagers.