




GAS DETECTOR


JT-GA01-ZB

INSTRUCTIONS FOR USE OF WIRELESS GAS DETECTOR

● Product Introduction

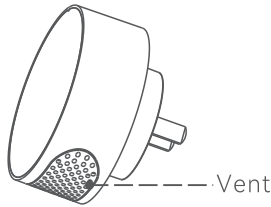

Overall schematic

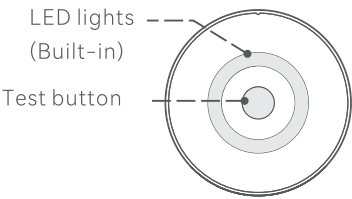

Front view

JT-GA01-ZB is a gas detector suitable for indoors. It works stably, does not need to be installed, plug and play, can detect the leaking gas in time, and send out sound and light alarm signals, and push the alarm information to your mobile phone and platform.

● Specifications

Model number	JT-GA01-ZB
Working frequency band	2.4GHz
Wireless technology	Zigbee IEEE802.15.4
Wireless transmission distance	30~50m (indoor)
Induction gas	methane (coal gas, natural gas, liquefied petroleum gas)
Alarm concentration	8%LEL
Alarm concentration error	±3%LEL
Buzzer volume	≥70dB (1 meter directly in front)
Working voltage	AC 100V~240V
Alarm mode	sound and light alarm, output alarm signal
Working temperature	-10℃ ~ 50℃
Working humidity	≤90%RH
Appearance size	Φ65*H51mm
Color	White

● State description



Status	Description
Power on	The buzzer sounds once, the green light flashes to enter the preheating state
Alarm prompt	Red light flashes, buzzer sounds
Fault	The yellow light is always on and the buzzer sounds