


Dual Thorn BT Game Controller

Product Manual(PG-9167)

Product application instruction:


- 1.This product support direct-play mode for Android/ iOS, especially designed for 《PUBG Mobile》、《Arena of Valor》、《Knives Out》 etc., Plug & Play, other game app and activation are both non-necessary, makes the setting process easier (support Android 6.0 or above, iOS 11.0-13.3.1, IOS 13.4: Single Joypad);
 - 2.This product is compatible with Android/ iOS smartphone/ tablet, smart TV which are enabled to play games after wireless connection; And support for P3/ N.S console/ PC computer which are enabled to play games after wired connection,;
 - 3.The extendable size maximum to 135-250mm, able to hold 11 inch iPad pro;
 - 4.The right joypad is detachable, and the left is non-detachable, it can be treated as a single hand gamepad (Support Hot Swap);
 - 5.Accessories includes a wired audio converter module,makes wired audio connection possible;
 - 6.This product support TURBO function,brings better game experience for the player.
 - 7.Ergonomic design, comfortable feeling;
- ★ Due to mobile system issues, some mobile may not support this device(e.g.:mobile under MTK platform do not support)
- ★ Android direct-play mode doesn't support for single joypad, please try the HID mode/ iOS.
- ★ Due to the official game platform software upgrades or source code changes and other not resist factors caused some of the game can not be played or connected with our Gamepad, iPega company has no responsibility. iPega reserve the right of final interpretation for this.

Button Illustration

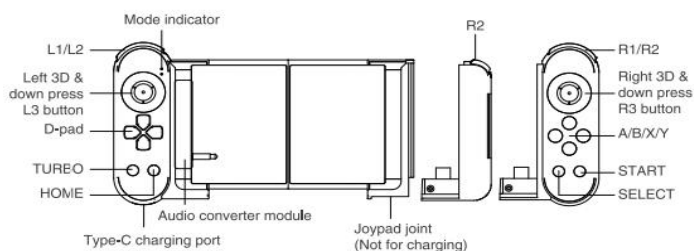

Electrical Parameters:


- 1.Working voltage: DC3.7V;
- 2.Working current: <15mA;
- 3.Static current: <15uA;
- 4.Play time: >15H;
- 5.Input voltage/current: DC5V/500mA;
- 6.Charging: around 2hrs;
- 7.BT 4.0, transmission distance: ≤8M;
- 8.Battery: 380mAh;
- 9.Standby time: 30 days after fully charged;

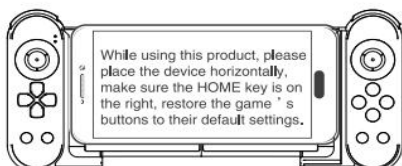

Usage instruction:

Android V3 direct-play mode: (This mode doesn't support to operate game under single-hand gamepad)

Press and hold down the D-pad button"RIGHT" + HOME button for around 2 seconds to enter V3 direct-play mode(Android), blue LED start flash quickly,search bluetooth name"PG-9167" on Android mobile/ tablet and connect it! After the connection is successful, the blue LED is always on! Once connected, you can press HOME button directly, blue LED slowly flash, and the blue LED is always on, means automatically reconnected!

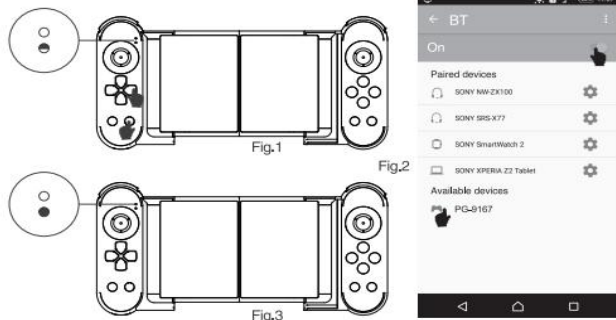

Instruction for Single Joypad Under IOS 13.4


Operation Procedure:

Install the latest App version ShootingPlus V3.1 from APP store, enter the App and touch " Device Not Connected " to access BT setting. Starting up the game controller and switch the mode to IOS 13.4 (pls refer to the updated info. as below),then enter the BT for pairing (BT name " PG-9167 "). Back to App main interface, go get the presetting from game list (e.g.PUBG Mobile), after buttons setting accordingly, then start gaming.




Updated Info.:

Installation and detachable method of right joypad

1.Press the right joypad as shown by the arrow in Figure 1 below, and push it upward until the joypad is stuck;

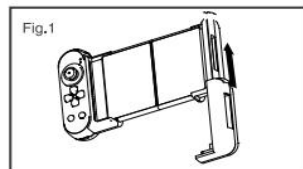


2.The installation is completed, as shown in Figure 2 below;

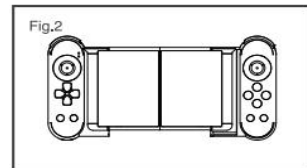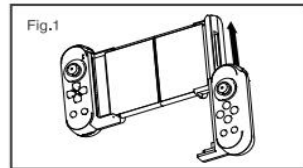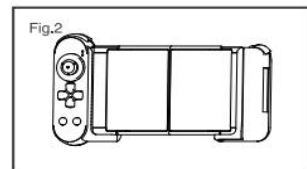


3. When the right joypad needs to be removed, press and hold the /B button on the back of the product and pull down the right joypad at the same time to remove the right joypad;

How to charge the mobile phone while using the gamepad

1. Pass the charging cable through the right joypad first, then connect the mobile phone, and then align the gamepad in the gamepad slot,;

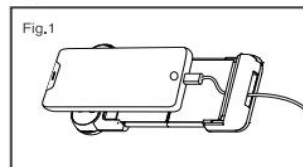


2. The installation is completed, as shown in Figure 2 below;

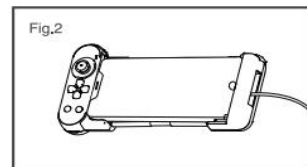

iOS V3 direct-play mode(iOS 11.0-13.3.1):

Press and hold down the D-PAD button"LEFT" + HOME button for around 2 seconds to enter V3 direct-play mode(iOS), blue LED start flash quickly,search bluetooth name"PG-9167" on Apple mobile /tablet and connect it! After the connection is successful, the blue LED is always on! Once connected, you can press HOME button directly, blue LED slowly flash, and then blue LED is always on, means automatically reconnected!

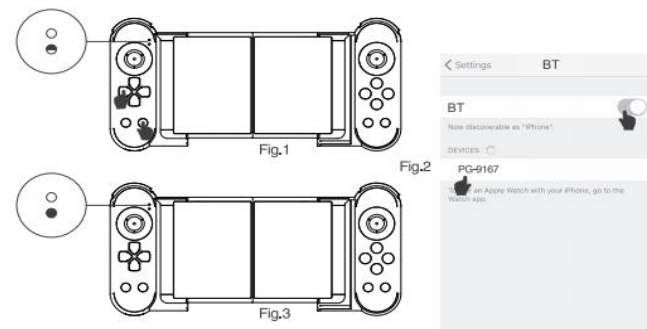

Android/IOS direct-play button mapping:

Search "www.iPega.hk" website, and select the default operation instructions. To set up the button mapping, please download and install " Shooting Plus V3 " APP; reset the buttons from the APP ! This product button is default as PUBGmobile!

Download APP:
Search "ShootingPlus" in the Apple App Store/Google Play Store, download and install the "ShootingPlus V3" app,;"



ShootingPlus V3



Special mode:

LEFT+MODE enter IOS_V3, added IOS 13.4 mode

RIGHT+MODE enter Android V3 mode

UP+MODE enter Android standard mode

Holding down R1 + insert usb enter wired mode

Reminder:

1, When playing shooting games, turn on the screen horizontal mode and ensure the fire button on the upper left side, go set the button with fire feature accordingly, e.g. PUBG mobile, as shown up in below pic.

(1) Tap on V3 icon and enter into edit page, after completed all buttons setting, appoint LB to fire button, the icon appear in the upper left side, and then click "confirm" to save the presetting.



2, Stay in horizontal screen mode during gaming under V3.1 APP. As shown up in picture: click the icon to lock the screen.



Wired mode:

It will automatically recognizes different mode under wired mode. Support playing games on Windows PC, Android device, P3 and N-S console.

1. PC connection method: Press and hold "R1" button while plug in the USB data cable to Windows PC (The default mode is X-input 360 mode), the blue LED is always on. Press and hold "select+start" for 3 seconds switch to D-input mode, the blue LED is always on.
2. P3 connection method: Press and hold "R1" button while plug in the USB data cable to P3 console, blue LED light will be always on after successfully connected.
3. N-S/ Android connection method: Press and hold "R1" button while plug in the USB data cable to Android device/ N-S console, the blue LED light will be always on after connected.


Operation Instructions:

BT Connection instruction (press and hold on 3's)	Android BT Mode		IOS BT Mode
	Direct Play Mode (Android V3)	Android General model	
	⬅ + HOME	⬅ + HOME	⬅ + HOME
Indicators	Blue LED light		
Remark	Gamepad operation and Touch screen operation are not supported at the same time		IOS 13.4 system is supported under single joy pad






(2) Enter the setting page from pubg game, click the operation setting and choose the 1st operation, click "customized layout", and then place the fire button on the upper left side and adjust to match-able size.

Reminder: Pull down the notifications in the middle of screen, which will cause the fire button useless. In this case, keep the game app working and back to homepage, re-enter into the game app, then function will resume to normal.

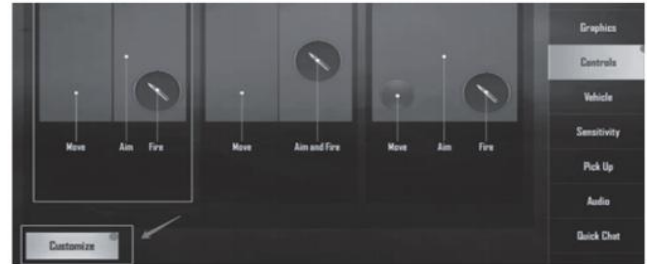

Android standard game mode:

Press and hold down the D-pad button "UP" + HOME button for 2 seconds to enter the Android standard game pairing mode, the blue LED light flashes quickly, search name "PG-9167" on the Android mobile phone / Android Tablet / Android smart TV and connect it! After the connection is successful, the blue LED is always on! Once connected, you can directly press the HOME button, the blue LED light flashes slowly, automatically back!

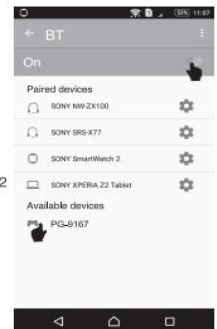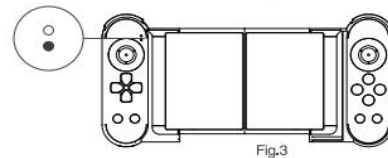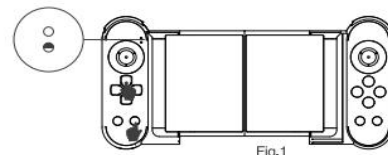

TURBO function

- Action buttons include (A/B/X/Y/L1/L2/R1/R2) eight buttons, all support to set up TURBO function by manual;
- Setting method: Hold down the action button, then press TURBO button to restart the function, repeat the operation to close down the function;
- After the product sleep, shut down and restart, the previous setting for turbo function is automatically cleared. If the turbo function is enabled, it must be reset!


Charging/Sleep/Wake-up/Shutdown

- ① Charging:
 - a. Low power, orange LED flashes;
 - b. Charging: orange LED is always on;
 - c. Fully charged: orange LED is off;
- ② Charging/Sleep/Wake-up/Shutdown
 - a. Gamepad will shutdown to enter sleep mode if don't have any operation in 10min;
 - b. Once connected, just press HOME button to wakeup and reconnect it to use;
 - c. Under turning on, hold down HOME button for 3 seconds, product shut down, all LED turn off;

Notes:

1. Please do not store this product in wet or high-temperature areas.
2. Don't knap, beat, drub, pierce, or try to decompose this product, to avoid unnecessary damage to the product.
3. The product has built-in batteries, and please don't discard them together with the garbages.
4. Don't charge the controller in a place near the fire or other heat source.
5. Non professional personnel should not disassemble the product, otherwise it will not be covered in the after-sales warranty service.

Product list:

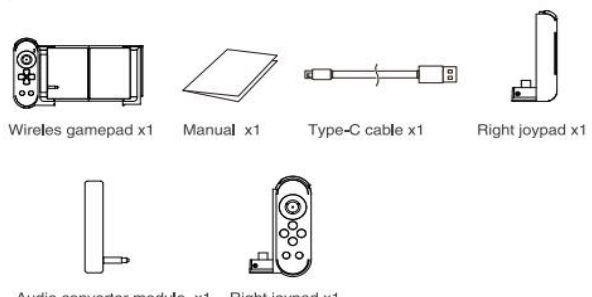

BT Connection instruction (press and hold on 3's)	Wired mode(connecting by USB data cable)	
	P3/N-S / Android Wired mode	PC Wired mode
	Press the R1 button and connect the gamepad to the P3 console'sport via theUSB cable.	
Indicators	Blue LED light	
Remark		Press and hold SELECT + STARTat the same time,P3 and 360 modes can switch freely

Audio converter module x1 Right joypad x1

IPEga trademarks belongs to IPEGA LIMITED.

Patent NO.: ZL201930338129.7