


SPECIFICATION AND USER MANUAL

Model Name: **707** wired keyboard **Keys:107keys**


Product Picture

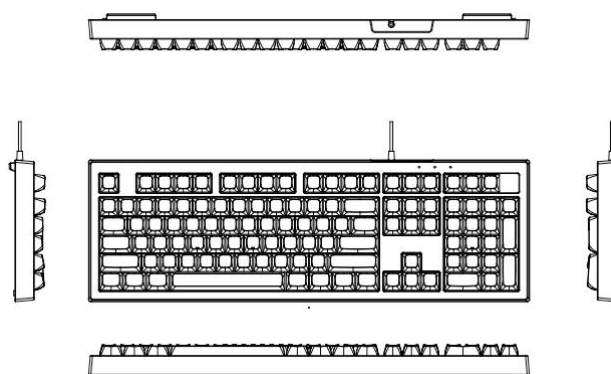

Category	Details	Standard	Details	Standard
BASE SPECIFICATION	Keyboard Type	Wired Membrane Keyboard	Layout Version	EN/US/UK/ES/TR
	Interface Type	USB Detachable	Size (L * W * H)	450.15 (L) ×144.15 (W) ×35.31 (H) ±1mm
	Connection Mode	Wired	N.W	811g
	Multimedia Function Key	Support	Cable	Type C wired Rechargeable
	Rated Voltage	DC 4.5~5V	Cable Color	Black or White
	Rated current	100MA	Interface Compatibility	USB1.1port&lastest
	Key Resilience	60 ± 10 g	System Compatibility	Windows All /MAC
	Key Life	10 million times	Backlight Color	RGB
	Backlight	Support	Backlit Breathing Light	YES
	Backlight Control Key	Yes	Wave Lighting	YES
	ESD Test	Passed		
	Editable Software	No	Ergonomic	Yes
	Support Plug and Play	Support	Letter Printing	Laser print

	Working Humidity		10%~90% RH 25°C	Storage Humidity	5%~95% RH 25°C
	Storage Temperature		-20°C~65°C	Working Temperature	5°C~50°C
	Aesthetic Seam Test		Seam between the top cover and bottom cover: 0.2 ± 0.1 mm.		
	Keyboard Noise Test:		Measured at a distance of 420 ± 10 mm, noise level ≤ 90 dB.		
Selling Points	1	No USB driver is required for plug and play			
	2	Program Function Key			
	3	Effortless Typing comfort			
	4	Membrane Keyboard			
	5	RGB Backlight			
	6	Fashionable, designed colors			
	7	Abs materials ,not easy to break,super durable			
	8	Low Latency			
	9	26 keys Anti-ghosting			
	10	Adjustable Keyboard Feet			
Material specification parameter					
Spare Part			Color	Material	Surface Treatment
Cover				ABS	-
Bottom				ABS	-
Key caps				ABS	-
Two-stage Adjustable Feet				ABS	
Foot pad				Silicone	

Keyboard
layout

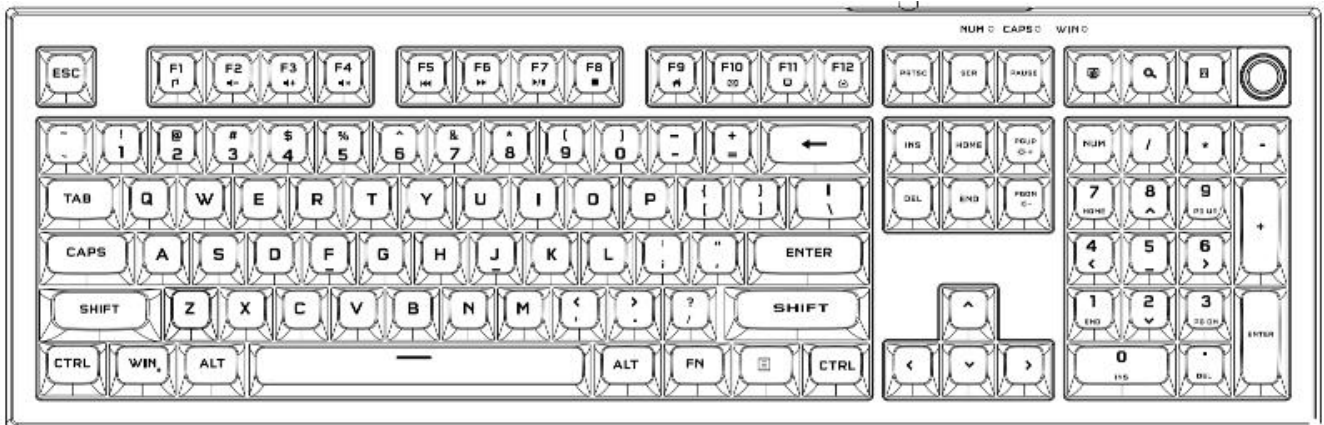

KEY COMBINATION	
FN+F1	Media Player
FN+F2	Volume-
FN+F3	Volume+
FN+F4	Mute
FN+F5	Previous Track
FN+F6	Next Track
FN+F7	Play/Pause
FN+F8	Stop
FN+F9	Homepage
FN+F10	E-Mail
FN+F11	My Computer
FN+F12	Lock Computer
FN+ 	Return to the desktop
FN+ 	Search
FN+ 	Calculator
FN+SCLK	Switch the RGB effect
FN+PRTSC	Turn off the lighting
FN+ INS	Switch the RGB colour
FN+PGUP	Increase brightness (levels: 0% → 25% → 40% → 55% → 70% →85% →100%).
FN+PGDN	Decrease brightness (levels: 100% →85% →70% →55% →40% →25% →0%).
FN + Left Win	Lock or unlock the Left Win key or App key

26 keys Anti-Ghosting

Tap、Caps、X、 F、 Shift-L、 Ctrl-L、 Alt-L、 G、 M、 T、 ↑、 ↓、 ←、 →、 W、 A、
S、 D、 Q、 B、 V、 R、 E、 Z、 C、 Space