


BS CAST IRON NON-RISING STEM, RESILIENT SEATED GATE VALVE

BS5163, PN16

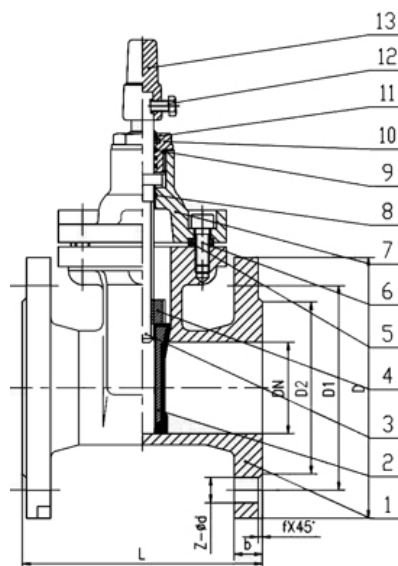

DESCRIPTION:

Available Medium: T-Water, Steam, W-petroleum Products

Working Temperature: T-200°C, W-100°C

Face to Face Dimensions: BS5163 GB12232

Flange Dimensions: BS4504

DIMENSIONS(MM)							
DN	L	D	D1	D2	b	Z- φ d	f
50	178	165	125	102	20	4-18	3
65	190	185	145	122	20	4-18	3
80	203	200	160	138	20	8-18	3
100	229	220	180	158	20	8-18	3
150	267	285	240	212	22	8-22	3
200	292	340	295	268	24	12-22	3
250	330	405	355	320	28	12-26	3
300	356	460	410	378	28	12-26	4

MATERIALS		
ITEM	PARTS NAME	MATERIAL
1	BODY	DUCTILE IRON
2	SEAT	DUCTILE IRON+RUBBER
3	STEM	STAINLESS STEEL
4	STEM NUT	BRASS
5	GASKET	RUBBER
6	HEXAGON SOCKET SCREWS	CARBON STEEL
7	BONNET	DUCTILE IRON
8	"O"RING	RUBBER
9	"O"RING	RUBBER
10	NUT	BRASS
11	SHIELD	RUBBER
12	BOLT	CARBON STEEL
13	WRENCH/WHEEL	DUCTILE IRON