


Wire Define:
 Pin 1 +24V
 Pin 2 -
 Pin 3 GND

Slewing Drive Performance Data	
Gear Ratio	73:1
Rated Output Speed	0.08 rpm
Rated Output Torque	657 N.m
Tilting Moment Torque	13.5 kN.m
Static Axial Rating	133 kN
Static Radial Rating	53 kN
Dynamic Axial Rating	32 kN
Dynamic Radial Rating	28 kN
Tracking Precision	≤0.2°
Self Locking Gears	Yes
Weight	23 kg
24VDC Motor Performance Data	
Rated Voltage	24V
Rated current	<2 A
Rated output speed	888 rpm
Rated output torque	0.29 N.m
Temperature	-40°C-60°C
IP class	IP55
Reduction Gearbox Performance Data	
Gear ratio	148:1
Rated output speed	6 rpm
Rated output torque	30 N.m
Temperature	-40°C-60°C
IP class	IP55
Efficiency	>70%

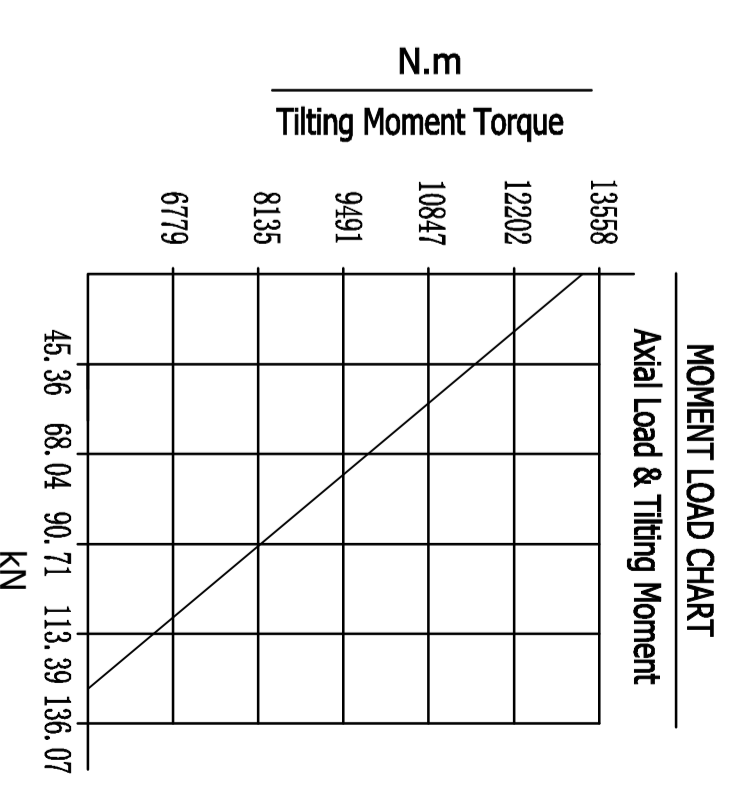

REV	DATE	REVISER	DESCRIPTION
DESIGNED BY	Xuzhou Wanda Slewing Bearing Co., Ltd.		
CHECKED BY	www.slew-bearing.com		
APPROVED BY	Tel: +86-516-83309366 Fax: +86-516-83915766		
ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER HERE OF ARE RESERVED, AND NO PERMISSION IS GRANTED OR TO DISCLOSE, REPRODUCE THIS PRINT IN WHOLE OR IN PART, ANY OF THE INFORMATION TO OTHERS.			
SYMBOL: ISO	SIZE	A3	SHEET
			1/1
SLEWING DRIVE			REV
SE7-73-R-24008-REV.A			A