深圳中陇天包装科技有限公司
SHENZHEN ZOLO PACKAGING TECHNOLOGY CO., LTD

材料分析报告
Technical Data Sheet

品　名 Article Name	25#红色全转移OPEN VOID阴版防伪胶带 25# Red total transfer OPEN VOID security tape	**内部品名** The internal name	25#红色全转移OPEN VOID阴版防伪胶带	**防伪类型** Anti fake type	全转移 Total transfer	**字体大小** Font Size	中号 Middle

产品结构
PRODUCTION CONSTRUCTION

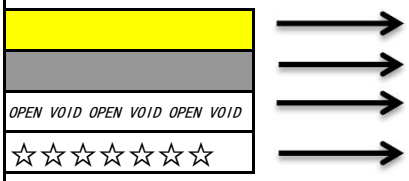

离型层	Release coating layer
PET	PET film
防伪层	Hidden message
胶层	Adhesive

面材 SURFACE MATERIAL		粘胶 PRESSURE SENSITIVE ADHESIVE	
基材名称 Article Name	PET	**胶系** ADHESIVE	压克力/snjs01 Acrylic adhesive
基材厚度（mm） THICKNESS	0.025±0.003	**上胶厚度（mm）** THICKNESS	0.018±0.005
基材颜色 COLOR	透明 Transparent	**上胶量（g/m2）** DRY COATING WEIGHT	20±2
材料总厚度（mm） Total material thickness	0.048±0.005	**初粘力(NO/BALL)** INITIAL TACK	2 ~ 5
印刷颜色 PRINT COLOR	红色 Red	**保持力（hr/kg×inch）** HOLDING POWER	12↑
平滑度 SMOOTHNESS	GOOD	**剥离力(N/inch)** 180° PEEL ADHESIVE	0.1 ~ 0.8 特指全转移防伪层脱离力度
耐候性 WEATHER RESISTANCE	GOOD	**离型力(g/in)** Release force	3 ~ 8
适用温度(℃) TEMPERATURE RANGE	0 ~ 50	其它、特殊要求	/

备注：以上各项技术资料是本公司采用公认可靠之检验方法，经多次检验所得平均数据. 但为确保正确选择与使用本公司之产品，请您基于使用之对象，先行对使用目的与条件作详尽了解与试用，或通知本公司，以便为您更进一步说明与服务.

REMARK: THE TECHNICAL DATA ARE BASED ON THE RELIABLE EXPERIMENT CARRIED BY THE COMPANY.WHICH HOWEVER ARE NOT TO GAURANTEE THOSE PROPERTIES AND CHARACTERISTICS COMPLETELY AS SPECIFIED THEREIN,KINDLY STUDY YOUR PURPOSE AND CONDITION TO USE THIS PRODUCT PREVIOUSLY IN DETAIL UPON YOUR OWN RESPONSIBILITY.

拟定人 Made by	Shirley Chen	拟定日期 Date of draft	20240128	版本号 version number	V2