
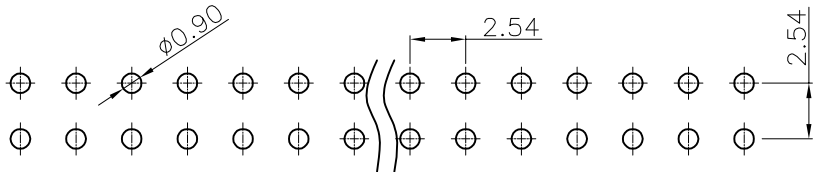
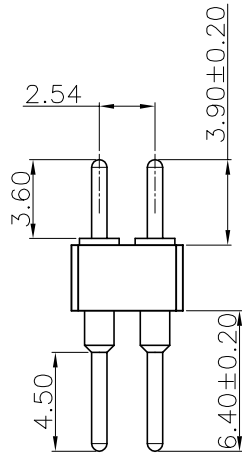
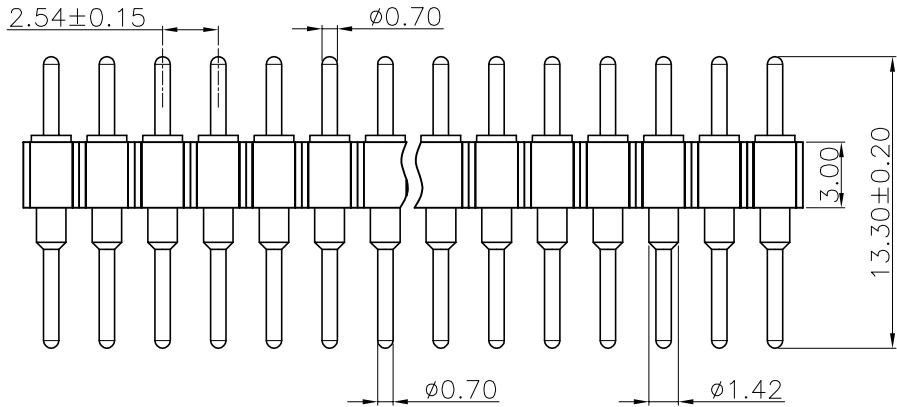


4			3			2			1		
零件图	成品图	客户图				REVISION DATA					
		○				REV	ECN No.	DESCRIPTION	NAME	DATE	
						A0		NEW DRAWING	D.Y.Y	2022-12-16	

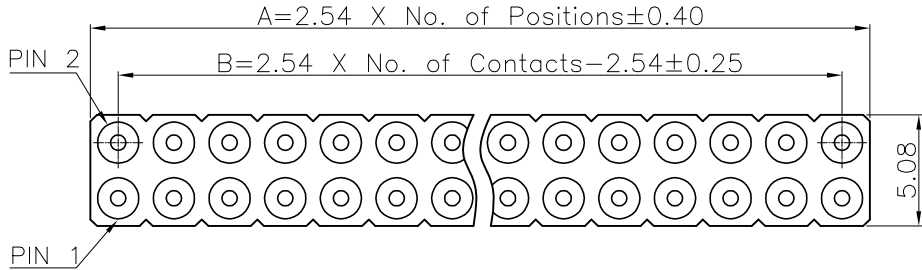

P.C.B LAYOUT

PA	D	XXX	2	7	X	X	00	1330A	0	00
Angel Options D 180°直插 R 90°折弯 S SMT H 卧式贴片 A 单排SMT B 第1Pin朝下 S 单排SMT S 第1Pin朝上	No. of Positions XXX Positions	Dip Spacing 0 No 1 1.27mm 2 2.54mm 3 7.62mm 4 10.16mm 6 15.24mm 9 22.86mm S Special	Insulator Height 0 No 1 1.20 mm 2 1.90 mm 3 2.00 mm 4 2.10 mm 5 2.20 mm 6 2.80 mm 7 3.00 mm 8 3.80 mm 9 4.10 mm A 4.20 mm B 7.00 mm S Special	Insulator type A PBT单排 B PBT双排 C PBT中空 D PBT带杠 E PPS单排 F PPS双排 G PPS中空 H PPS带杠 I PA46单排 J PA46双排 K PA46三排 L PA66单排 M LCP四排	Pin Plated 0 No 1 Tin120u" 锡 2 Tin200u" 锡 3 Gold0.4u" 金 4 Gold0.8u" 金 5 Gold1u" 金 6 Gold1.5u" 金 7 Gold2u" 金 8 Gold3u" 金 9 Gold5u" 金 A Gold8u" 金 B Gold10u" 金 C Gold15u" 金 D Gold30u" 金 E Ag plated F Nickel80u"	Clip plated 0 No 1 Tin120u" 锡 2 Tin200u" 锡 3 Gold0.4u" 金 4 Gold0.8u" 金 5 Gold1u" 金 6 Gold1.5u" 金 7 Gold2u" 金 8 Gold3u" 金 9 Gold5u" 金 A Gold8u" 金 B Gold10u" 金 C Gold15u" 金 D Gold30u" 金 E Ag plated F Nickel 80u"	Pin length(mm) 1330A 13.3mm S Special	Insulator Option 0 No	Series 00 No	

Technical Data

Material:

Pin(outer sleeve): Brass

Insulator black(housing): PPS+G/F30%.

Plating:

PIN: Plating Gold Or Plating Tin100u" Min

TERMINAL: Plating Gold Or Plating Tin100u" Min

Under Plating: Nickel 50u" Min Overall.

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: ≤20mΩ/contact

Insulation resistance: ≥1000MΩ at V=100V

Operating voltage: 60VAC/DC

Mechanical:

Mechanical life cycle:min.200

Operating temperatures: Gold Plated:−55°C to+105°C

Tin plated:−40°C to+105°C

Soldering temperature: +260°C,10s max

No.of Pins:2x02~2x40Pin

ANYCONN®
www.enkcom.com
TEL:+86(0)769 8904 9672
FAX:+86(0)769 8904 9671
E-MAIL:sales@anycom.tw

东莞市恩康电子科技有限公司

DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD

TOLERANCE	DATE :	2022-12-16	TITLE: 2.54mmPitch Sip Sockets Double Row Pin Length 13.30mm			
ANGLE ±5°	DRAWN :	D.Y.Y	PART NO: PADXXX27XX001330A000			
X.XXX ±0.15	CHECKED :					
X.XX ±0.25	APPROVED :					
X.X ±0.40	PROJECTON		REV: A0	UNIT: mm	SCALE: 1:1	SIZE: A4
X. ±0.50					PAGE: 1/1	