



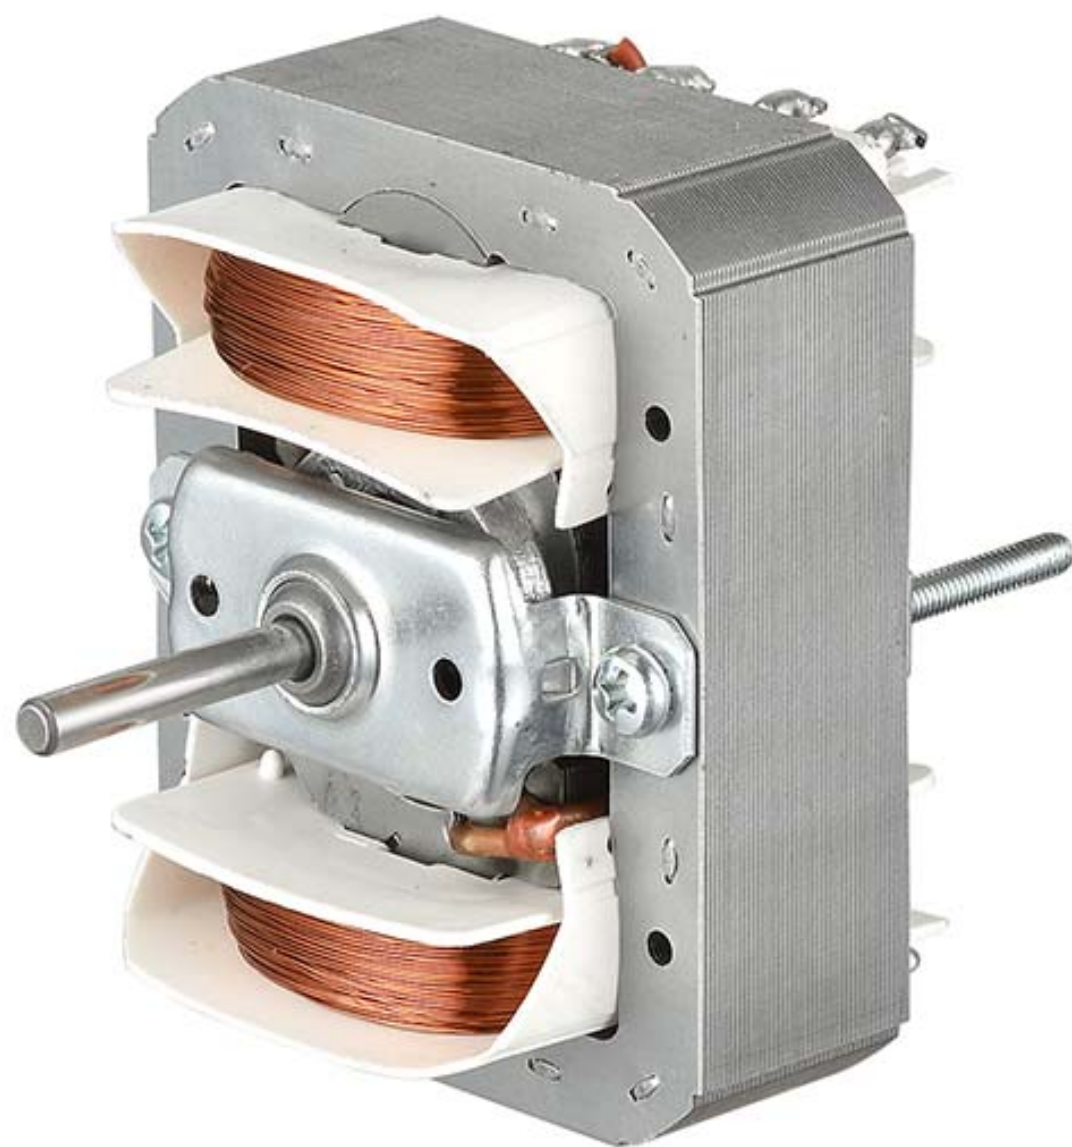

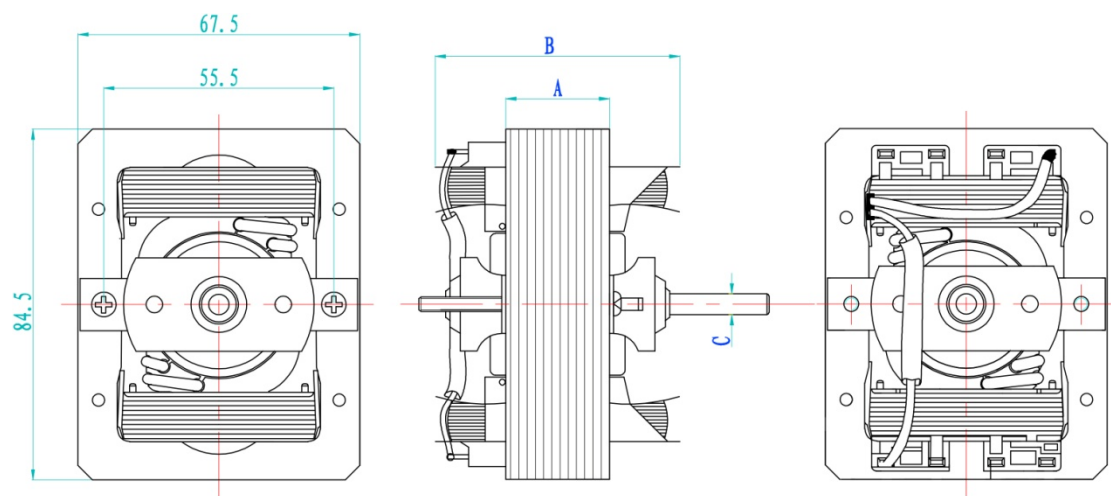

Technical datas

Unit:mm

型号 MODEL	尺寸 A Dim.A	尺寸 B Dim.B	尺寸 C Dim.C	电压(V) Volt(V)	频率(Hz) Freq.(Hz)	最大扭矩(mN.m) Max.torque(mN.m)	最大输入功率(W) Max.input power(W)	最大输出功率(W) Max.output power(W)
6818	18	49.5	ø5/ø6	100~127	50/60	57.4	64	14
				220~240	50/60			
6820	20	51.5	ø5/ø6	100~127	50/60	63.7	71	15

				220~240	50/60			
6825	25	56.5	ø5/ø6	100~127	50/60	79.7	89	19
				220~240	50/60			
6833	33	64.5	ø5/ø6	100~127	50/60	107.6	118	26
				220~240	50/60			
6842	42	73.5	ø5/ø6	100~127	50/60	137.0	150	33
				220~240	50/60			
6845	45	76.5	ø5/ø6	100~127	50/60	157.0	152	38
				220~240	50/60			

Performanc : For stack size 25mm only.

	电压	电流	输入功率	转矩	转速	输出功率	效率	功率因数	频率
--	----	----	------	----	----	------	----	------	----

	Voltage	Current	Input Power	Torque	Speed	Output Power	Eff	PF	Frequency
	V	A	W	mN.m	rpm	W	%		Hz
未加载点 No-load	229.94	0.625	65.186	1.434	2886.32	0.433	0.66	0.454	50.00
最高效率点 Max Eff	229.94	0.737	96.227	90.822	2376.26	22.600	23.49	0.568	50.00
最大输出功率点 Max Output Power	229.94	0.761	100.396	97.173	2269.89	23.098	23.01	0.574	50.00
最大转矩点 Max Torque	229.94	0.802	106.630	101.798	2056.00	21.917	20.55	0.578	50.00

