


Xiamen Honch Industrial Suppliers Co Ltd

Tel: +86-592-7619780 <http://www.honch-ind.com> Email: rogeryu@honch-ind.com


1	MODEL	1738IBOX-01(GP)			
2	Dimension	17.0X38.0X17.0H		Weight	20.0 Gram.
3	Magnet	Materials	Rare Earth	Size	ø7.5X3.0 ø8.0X2.0 mm.
4	Nominal Impedance	4	Ohm	± 15 %	
5	Power Rating	Normal	2.5	W.	Maximum 3.0 W.
6	Lowest Resonant Frequency	1150	±	230	Hz
7	Output Sound Pressure Level	80 ± 3 dB / 1 Watt 1 Meter.			
		Average at		1200,1500,2000,2500 Hz	
8	Frequency Range	700~20K		Hz.	Average SPL-10 dB.
9	Distortion	5 %	Maximum At	1000	Hz 1.0 W.
10	Abnormal Sound Test	Must be Normally Tested By		3.16	Volts Sine Wave.
11	Load Test	White Noise with Weighted Filter 3.16 Volts. (RMS) 100 Hrs.			
12	Operation Temperature	-10°C ~ +50°C			
13	Storage Temperature	-10°C ~ +55°C			
14	Polarity	Diaphragm shall move Forward when Apply a Positive DC			
		Current to the "+" or "Marked" Terminal.			
15	Remarks	Above specifications on the strength of CNS4784 and CNS4785.			

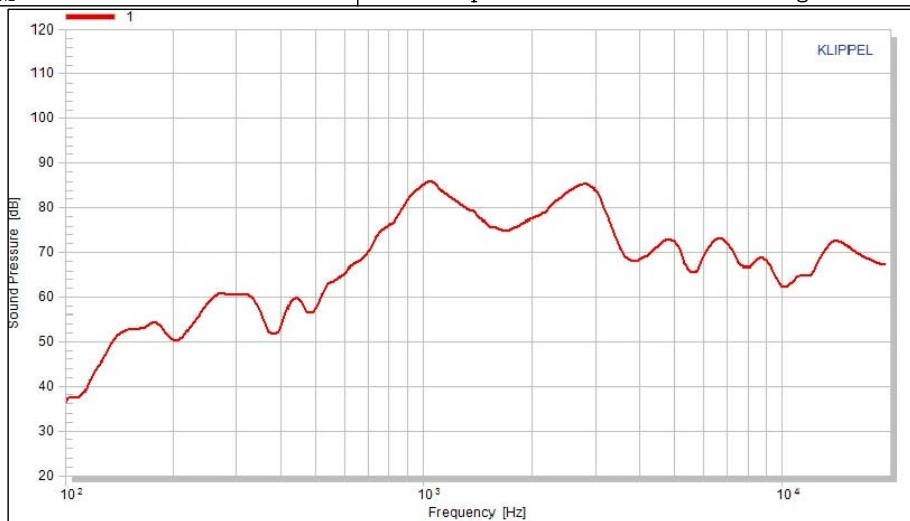

Bill of Material	
ITEM	SPEC.
SURROUND	CLOTH
DIAPHRAGM	PAPER

Dimension:



details see drawing name "1738IBOX-01(GP) outside view".



Admitted:

Approved:

Made:

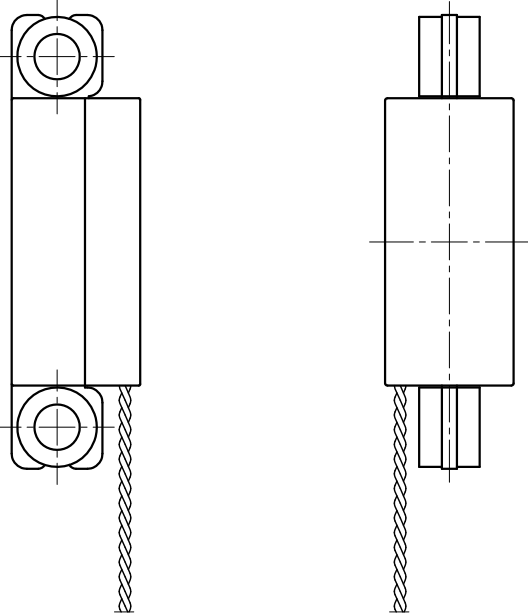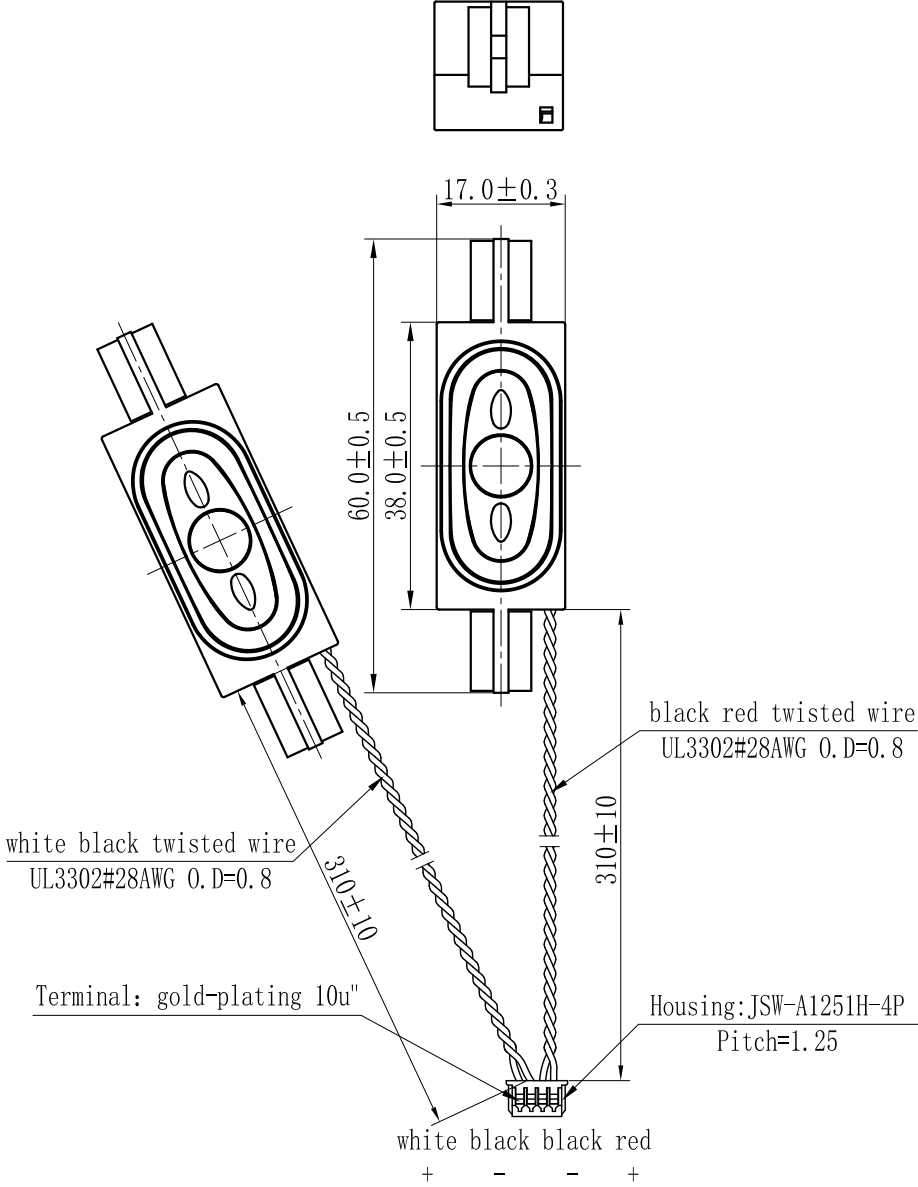

1738IBOX-01 (GP) outside view			Name		1738IBOX-01 (GP)	
Made			Scale	1:1	Quantity	
Check			Material		Weight	
Admit			P1/1			
			Xiamen Honch Industrial Suppliers			