

Synthetic Rubber Based Aluminum Foil Tape

Carrier: aluminum foil

Foil color: silver, white, brown, black

Liner: white silicone release paper, white/blue PE release film, or without release liner

Adhesive: solvent based acrylic, synthetic rubber-resin, water based acrylic

Feature: high quality adhesive with super strong adhesion and holding power


good temperature resistance and aging resistance

low moisture vapor transmission rate

Standard size: 50mm x 50m, 1.2m x 1200m, etc.

Application: widely used for seaming and joint bonding of various vapor barriers, fixing thermal fin in refrigerators. provide fast and permanent bond performance for vapor barrier against the moisture.

Item No.	Thickness (micron)	Peel Adhesion (N/25mm)	Tensile Strength (N/25mm)	Service Temperature (°C)	Elongation (%)
T-H2201P	22	18	40	-20~+80	3
T-H2501P	25	18	45	-20~+80	3
T-H3001P	30	20	45	-20~+80	3
T-H4001P	40	20	55	-20~+80	3
T-H5001P	50	20	75	-20~+80	3
T-FSK7101H	71	25	120	-20~+80	1
T-FEM7101H	71	25	100	-20~+80	25

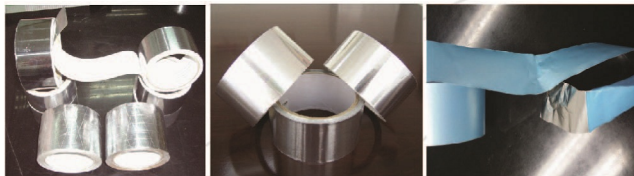

Solvent Based Acrylic Aluminum Foil Tape

Item No.	Thickness (micron)	Peel Adhesion (N/25mm)	Tensile Strength (N/25mm)	Service Temperature (DC)	Elongation (%)
T-S2201P	22	15	40	-30~+120	3
T-S2501P	25	15	45	-30~+120	3
T-S3001P	30	20	45	-30~+120	3
T-S3601P	36	20	50	-30~+120	3
T-S4001P	40	18	55	-30~+120	3
T-S5001P	50	20	75	-30~+120	3
T-S7501P	75	20	100	-40~+150	5
T-S1001P	100	20	125	-30~+120	5
T-S1251P	125	20	150	-40~+149	5
T-S1501P	150	20	180	-30~+120	5
T-S3001R/CW	30	15	45	-30~+120	3
T-S4001R/CW	40	15	55	-35~+120	3
T-S5001R/CW	50	15	75	-35~+120	3.5
T-S3001CW	30	15	45	-35~+120	3
T-S4001CW	40	15	45	-35~+120	3
T-S5001CW	50	15	75	-35~+120	3.5
T-S2501BL	25	15	40	-30~+120	3
T-S3001BL	30	15	45	-30~+120	3
T-S3601BL	36	15	50	-30~+120	3
T-S3001WL	30	12	45	-30~+120	3
T-S4001WL	40	12	55	-30~+120	3
T-S5001WL	50	12	75	-30~+120	3.5
T-S7501WL	75	12	100	-40~+149	5
T-SWPF7501WL	55	12	120	-30~+100	20
T-SWWP5001WL	50	10	175	-30~+85	100
T-SMFDC2501WL	25	10	75	-30~+100	100
T-FSK1201H	120	25	120	-30~+120	2
T-ASJ1501H	150	20	215	-30~+80	1
T-AGC12090S	120	18	255	-30~+120	5
T-AGC12590S	125	20	255	-30~+120	5
T-WPSK1201H	120	20	185	-30~+80	1
T-FS4301H	43	15	100	-30~+120	3
T-FS5001H	50	15	120	-30~+120	3
T-FEM7201S	72	20	100	-30~+120	25