


CDSD系列宽支腿型半电动堆垛车

CDSD SERIES LEG-INSERT SEMI-ELECTRIC STACKER

主要特点

MAIN CHARACTER

- 1、选用进口液压站，低噪音，小振动，密封性能好，确保起升下降平稳可靠
 - 2、高强度车身设计，特殊压制工艺制造的“C”型钢门架，坚固耐用，使用寿命长
 - 3、配置免维护蓄电池，电量持久，并选用智能充电器，德国REMA充电插件，充电方便快捷
 - 4、宽支腿型车身，具有高度稳定性
 - 5、锻造货叉，货叉外宽可调节，操作更方便
1. WINNER hydraulic power pack, low noise, few vibration and excellent leak tightness, ensures smooth lifting
 2. High-strength frame design and “C” shaped mast, strong and durable, ensures longer service life
 3. Maintenance-free battery, intelligent charger, REMA plug from Germany
 4. Straddle leg, stable enough. Adjustable forging forks, convenient and solid enough

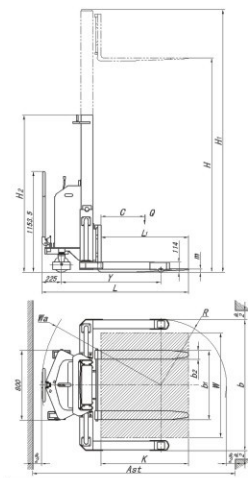

技术参数

TECHNICAL DATA

特性 Identification	产品型号 Model		CDSD10							
	配置号 Config-code		AK10/AK15							
	驱动形式 Drive Unit		半电动 Semi-electric							
	驾驶方式 Operation type		步行式 Pedestrian							
	额定载重 Load capacity	Q	kg	1000/1500						
	载荷中心 Load center	C	mm	500						
基本尺寸 Dimension	总长 Overall length	L	mm	1674(AK10)/1691(AK15)						
	总宽 Overall width	b	mm	1502						
	总高 Overall height	H2	mm	2090	1800	2025	2125	2225	2325	
	起升高度 Lift height	H	mm	1600	2450	2900	3100	3300	3500	
	作业时最大高度 Max working height	H1	mm	2090	2980	3430	3630	3830	4030	
	货叉尺寸 Fork dimensions	L1 × b2 × m	mm	1000×100×32(AK10)/ 1000×100×35(AK15)						
	货叉外宽 Maximum fork width	b1	mm	230~790						
	最小堆垛通道 Min. aisle width for stacking	Ast	mm	2320						
	轴距 Wheelbase	Y	mm	1133						
	转弯半径 Turning radius	Wa	mm	1500						
性能 Performance	提升速度 Lift speed	满载 Loaded	mm/s	80						
		空载 Unloaded	mm/s	133						
	下降速度 Lowering speed	满载 Loaded	mm/s	113						
		空载 Unloaded	mm/s	103						
电机 Electric Motor	提升电机功率 Lift motor power	KW	1.5							
	蓄电池容量/电压 Battery capacity/voltage	Ah/V	120/12							
重量 Weight	自重(不含电池) Weight without battery	AK10	kg	452	522	543	552	562	572	
		AK15	kg	512	582	603	612	622	632	
	电池重量 Battery weight	kg	27.5							