



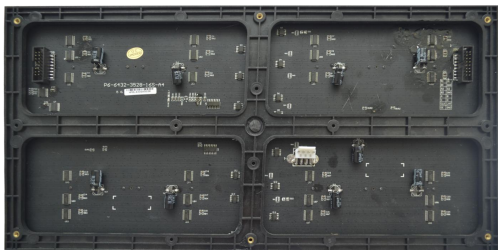

Shenzhen HLL Technology CO., LTD.

P5 Indoor Full Color Specification

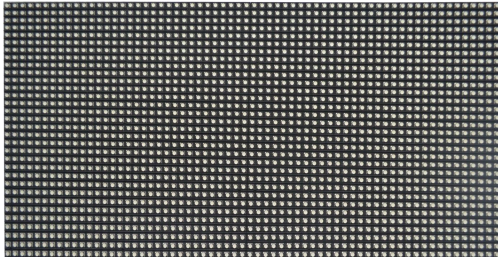

Specification	
Size:320mm×160mm	
LED color:1R1G1B 3in1 led 2121	
Module Power Consumption 6A / 30W	
Constant Current Drive:1/16Scan IC SM16016/16017	
RLED Epistar{350-400CD} Wavelength625±2nm	
GLED Epistar{6500--750CD} Wavelength520±2nm	
BLED Epistar{200--300CD} Wavelength470±2nm	
Weight 0.30kg	
Module Thickness 1.5CM	
Brightness 1000CD	
Module Pixel 64×32=2048 Dot Pixel 5mm	
LED Angle Horizontal ≥ 140° Vertical ≥ 140°	
Connector: HUB75	
Color Ratio: R:G:B/3:6:1	
Warranty	Use Life 100000Hrs
	Warranty 2 Year
Screen Parameter	Brightness, automatic adjust by sensors
	Continuous working time ≥ 48hrs
	Best view distance 5m--90m
	Pixel 40000 Dot
	Average Power consumption 300W/m ²
	Valtage AC220V±10%
Video Signal	RF、S-Video、RGB、RGBHV、YUV、YC、COMPOSITION
Packing	
Power cable 45CM by 2	Flat cable 20CM
Carton Size 63.2*37.8*19.5	Volume 0.087CBM
Weight 12kg	QTY/CTN 36PCS/CTN
	19.6PCS/SQM