

POS Printer






Welcome to **SPRT!**

We offer receipt printers to meet your requirement!

Offer the **High quality** products and **professional service** for you!



POS Receipt Printer Specification


Model No.		SPRT POS76III
Features:		    
Two color printing Drop-in easy loading Printing speed setting support Flexible interface, black mark test Overheating Protection		
Print	Printing Method	Dot Matrix
	Printing Speed	4.6 lines/s
	Resolution	40cpl-200(whole dot)/400(half dot)
	Effective Printing Width	66mm
Character	Character Set	ASCII, GB18030(Chinese) Chinese: 16 x 16
	Print Font	Font A: 7x9 Font B:9x9
	Character per Line	42/35
Paper Spec	Paper Type	Plain paper
	Paper Width	76.0± 0.5mm/57.5± 0.5mm
	Paper Roll Diameter	Max: 80.0mm
	Roll Core Inner Diameter	13mm(min.)
	Paper Thickness	0.05~0.08mm
Ribbon Cassette		ERC-39(Purple/Black/Red/Brown) or double color NH37702
Paper Supply Method		Drop-in easy paper loading
Printer Mechanism		Citizen Brand
Reliability	MCBF(MCBF) Mean Cycles Between Failure	9 million lines
	TPH	9 million lines
Barcode		N/A
Emulation		ESC/POS
Driver		Windows98/2000/NT/XP/Vista/Win7/Win8/Linux
Sensor		Paper Near End Sensor/ Paper End Sensor Optional
Drawer Port		1 Port
Interface		RS-232/Parallel/USB/Ethernet
Power Supply (Adapter)		AC100 ~240V ± 10%(include) DC 24V, 2A

Auto cutter	Type	Guillotine
	Life	500,000 cuts
	Cutting Method	Partial cut
Physical	Net Weight	With cutter:2.8kg, without cutter:2.4kg
	Gross Weight	With cutter:4.2kg, without cutter:3.8kg
	Printer Dimension (WxLxH)	160 x 260 x 150 mm
	Color	Black/Beige
Environment	Operating Temp	0~ 40 °C
	Storage Temp	-20~60°C
	Operating Humidity	10~80%
	Storage Humidity	10~90%
Inner Package (WxLxH)		395*310*280mm
Outer Package (WxLxH)		710*510*610mm (4 units)
Other features		Black mark location, paper end sensor, overheating protection, Buzzer

Description:

POS76III printer is a new type impact dot-matrix printer, it features in new structure, new platform, never paper jam, nine needle column bidirectional printing, big capacity, import mechanism, special designed ribbon.

POS76III printer: two color printing, drop-in easy loading flexible interface, black mark test and extensive application, power built-in and auto document feeder, especially suitable for commercial cash register, PC-POS, bank POS and all kinds of receipts print.

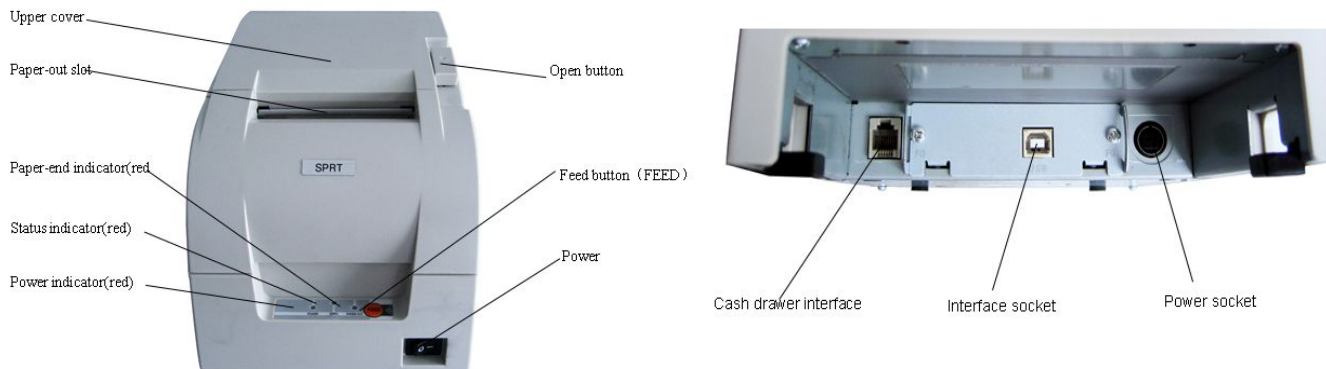

Application Area:

This is POS/Desktop printer which has more reliable capability, more steady printing and multi-interface support advantages. The POS printer can work on a lot of locations, such as Restaurant, Supermarket, Hotel, Retail Shop, Store, Coffee Shop, Service Center, Spa Entertainment, Bank, Logistics, Traffic police, Postal, Urban management, Tobacco, Meter reading, Supermarket, Clothing and other industries.

SPRT POS printer can well support the Java POS, ESC/POS, OPOS application.

JAVAPOS™ ESC/POS™ OPOS™

Packing Details

- 1x receipt printer
- 1x paper roll
- 1x power adaptor
- 1x power cable
- 1x interface cable

Inner Package (WxLxH) 395*310*280mm
 Outer Package (WxLxH) 710*510*610mm (4 units) per Standard Carton



Power adaptor for option:

- *British Standard
- *American Standard
- *European Standard
- *Chinese Standard



Warranty:

SPRT company offer the warranty as bellow:
For whole SPRT printer, 12 months upon delivery normally.
Some designated models can offer 24 months warranty.



WE SINCERELY LOOK FORWARD TO YOUR JOINING!