
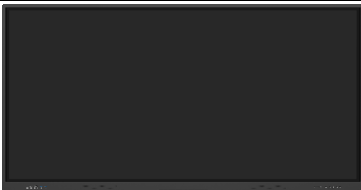


Product Specification

Model	EWB-86/EWB-75/EWB-65	
Mold Pictures		
System Physical Standard Configuration:		
Type	Details	Descriptions
Display	LCD Size	86"/75"/65"
	LCD Brand	LG
	Backlight Type	D-LED
	Resolution	3840x2160(pixels)
	Brightness	350cd/m²(min.)
		400cd/m²(typ.)
	Contrast Ratio	1200:1(typ.)
	Response Time	8ms (typ.)
	Pixel Pitch (mm)	0.4935(H)x0.4935(V)
	Refreshing Frequency	60Hz
	Viewing Angle	178°(H) / 178°(V)
	Life Time	30,000 hrs
	Color Gamut (X% NTSC)	72%
	View Area (mm)	1895.04(H)x1065.96(V)
Display Colors	1.07B(10Bit)	
Electrical	Chipset	MT9666
	Architecture	CA55
	Core	Quad Core
	Working Frequency	1.2~1.53GHz
	RAM	4GB DDR4
	ROM	32GB
	OS	Android 11
	Power Requirements	100-240V AC,50/60Hz
		200-240V AC,50/60Hz
	Power Consumption(Without OPS)	380W
	Standby Condition	<0.5W
Audio Output Power	2*15W@8Ω	
OPS Power	DC 18V/5A	
Interface	HDMI IN	HDMI2.0 *3
	DP IN(Optional)	DP1.2a *1
	HDMI OUT(Optional)	HDMI2.0*1
	USB2.0	Type-A *1
	USB3.0	Type-A *3
	Touch-USB Type-B	Touch interface for HDMI 1 *1
	Touch-USB Type-B	Touch interface for HDMI 2 *1
	LAN	10M/100M/1000M RJ45 *2
	MIC IN	Φ3.5mm *1
	Audio Output	Φ3.5mm *1
	RS232 IN	DB9 *1
	SPDIF OUT	Mas speed 16Mbps *1
	Type-C	Power out 15W *1
	WI-FI & BT	Frequency
Standard		802.11a/b/g/n/ac
Bluetooth		2.1+EDR4.2
Touch	sensing Type	Infrared Touch Frame
	Surface Protection	3.2mm Toughened Glass
	Infrared Touch	20 points on android, 40 points on windows
	Interpolation Resolution	32768*32768
	Touch Accuracy	±1mm
	Response Time	<8ms
	Output Mode	HID Standard
	Theory Clicks	Unlimited
	Minimum Touch Object	Single Touch >1.6mm
		Multiple >2mm
	Connect Type	USB2.0 Full Speed
	Voltage	DC+5V±5%
Power Consumption	<2W	
Structure	Product Size	1961.8mmx87.7mmx1169.9mm
	Package Size	2095mm×185mm×1265mm
	Housing	Metal plate
	VESA	4-M8 Screw Hole 800mm*600mm
Accessories Configuration:		
	Accessories	Quantity
	Touch Pen	*2
	3m Power Cord	*1
	Wall Mount	*1