

REV	DESCRIPTION	DRAWIN/DATE	CHECK/DATE	APPROVED/DATE
A	NEW RELEASE	Teany 23/04/21		

A

A

B

B

C

C

D


D

E

E

F


F

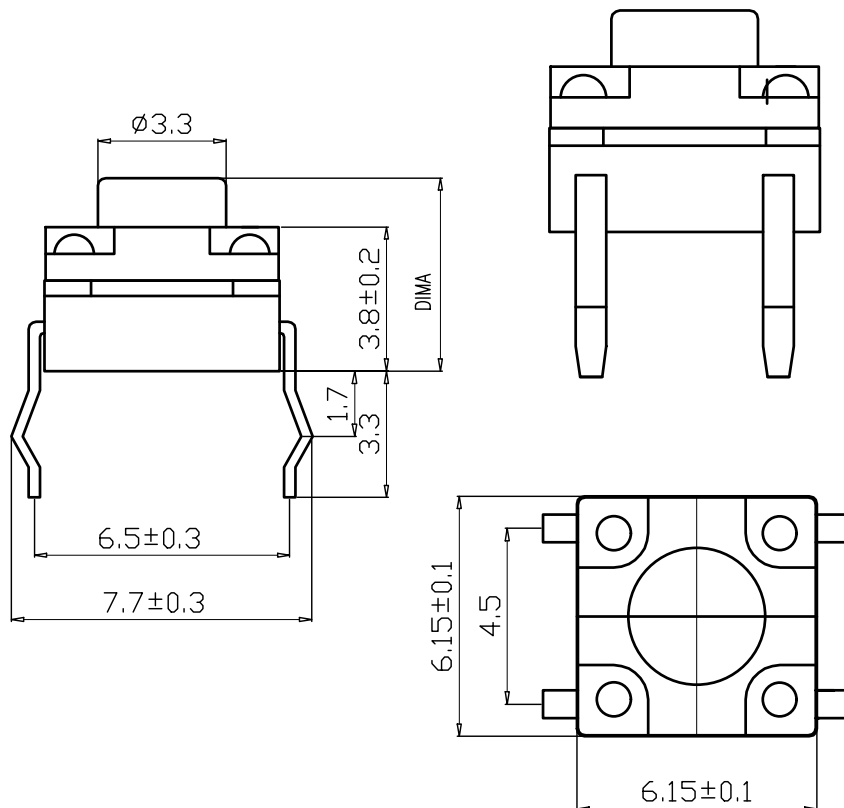

TECHNICAL PARAMETER;


1. RATING: 50mA DC6V
2. CONTACT RESISTANCE: $\leq 50m\Omega$
3. INSULATION RESISTANCE: $\geq 100m\Omega$
4. DIELECTRIC STRENGTH: 250V 500HZ 1Min
5. OPERATING FORCE: $250 \pm 50gf$
6. MECHANICAL LIFE: 50,000 ORDER

TYPE	DIM.A
1	4.3
2	5.0
3	6.0
4	6.3
5	7.0
6	8.0
7	8.5
8	9.0
9	9.5
10	10
11	11
12	12.0
13	13.0

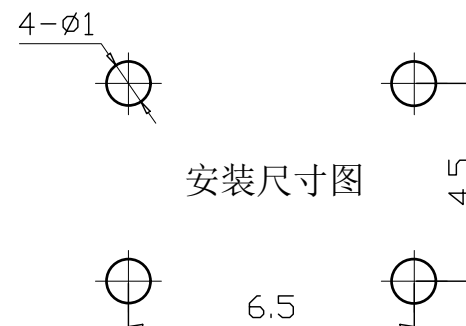

BILL OF MATERIAL :

6	WATERPROOF	1	FS-TS-3001-00-06	TS-3001 WATERPROOF	SILICA GEL	BLACK
5	SPRING	1	FS-TS-3001-00-05	TS-3001 SPRING	STAINLESS STEEL	PLATING SILVER
4	BUTTON	1	FS-TS-3001-00-04	TS-3001 BUTTON	PA66	BLACK
3	COVER	1	FS-TS-3001-00-03	TS-3001 COVER	PA66	BLACK
2	CONTACT	1	FS-TS-3001-00-02	TS-3001 CONTACT	BRASS	PLATING SILVER
1	HOUSING	1	FS-TS-3001-00-01	TS-3001 HOUSING	PPA	BLACK
ITEM	PART NAME	Q'TY/EA	DRAWING NO	PART NUMBER CODE	MATERIAL	COLOUR

GENERAL TOLERANCE		ANGLE TOLERANCE		 东莞市福顺电子科技有限公司 DONGGUAN FOSEN ELECTRONICS TECHNOLOGY CO.,LTD			
X.	±0.35	X°	±3.0°				
.X	±0.25	.X°	±2.0°				
.XX	±0.15	.XX°	±1.0°				
.XXX	±0.10						
MAJOR (QC CHECKED) : ▼ = 2 Places							
CONTROL POINT FAI : to		SCALE	1 : 1	DESIGN	DATE	TITLE: 6.0X6.0mm NUDGE SWITCH SERIES TS-3001	
		UNIT	mm	Teany	23/04/21		
CRITICAL (Cpk & Cp) : [X] = Places				CHECK	DATE	SERIES: NUDGE SWITCH SERIES SIZE A4	
				David	23/04/21		
SHEET 1 OF 1				APPROVED	DATE	DRAWIN NO: FSTS-3001-00-00 REV A	
				David	23/04/21		



东莞市福顺电子科技有限公司
DONGGUAN FOSUN ELECTRONICS TECHNOLOGY CO.,LTD