MAXEN ELECTRONICS LIMITED				Customer Code.:		SPECIFICATION OF BACKLIGHT	
				CUSTOMER'S P/N:	MX-B101FL40-IM33	EDITION:	01
Date:	2022.05.27	Page: 1/1	THE THIRD ANGLE			FX'S P/N: (include wrapper)	
						Approval (核准)	
						Check (检查)	
						Design (设计)	Laughing

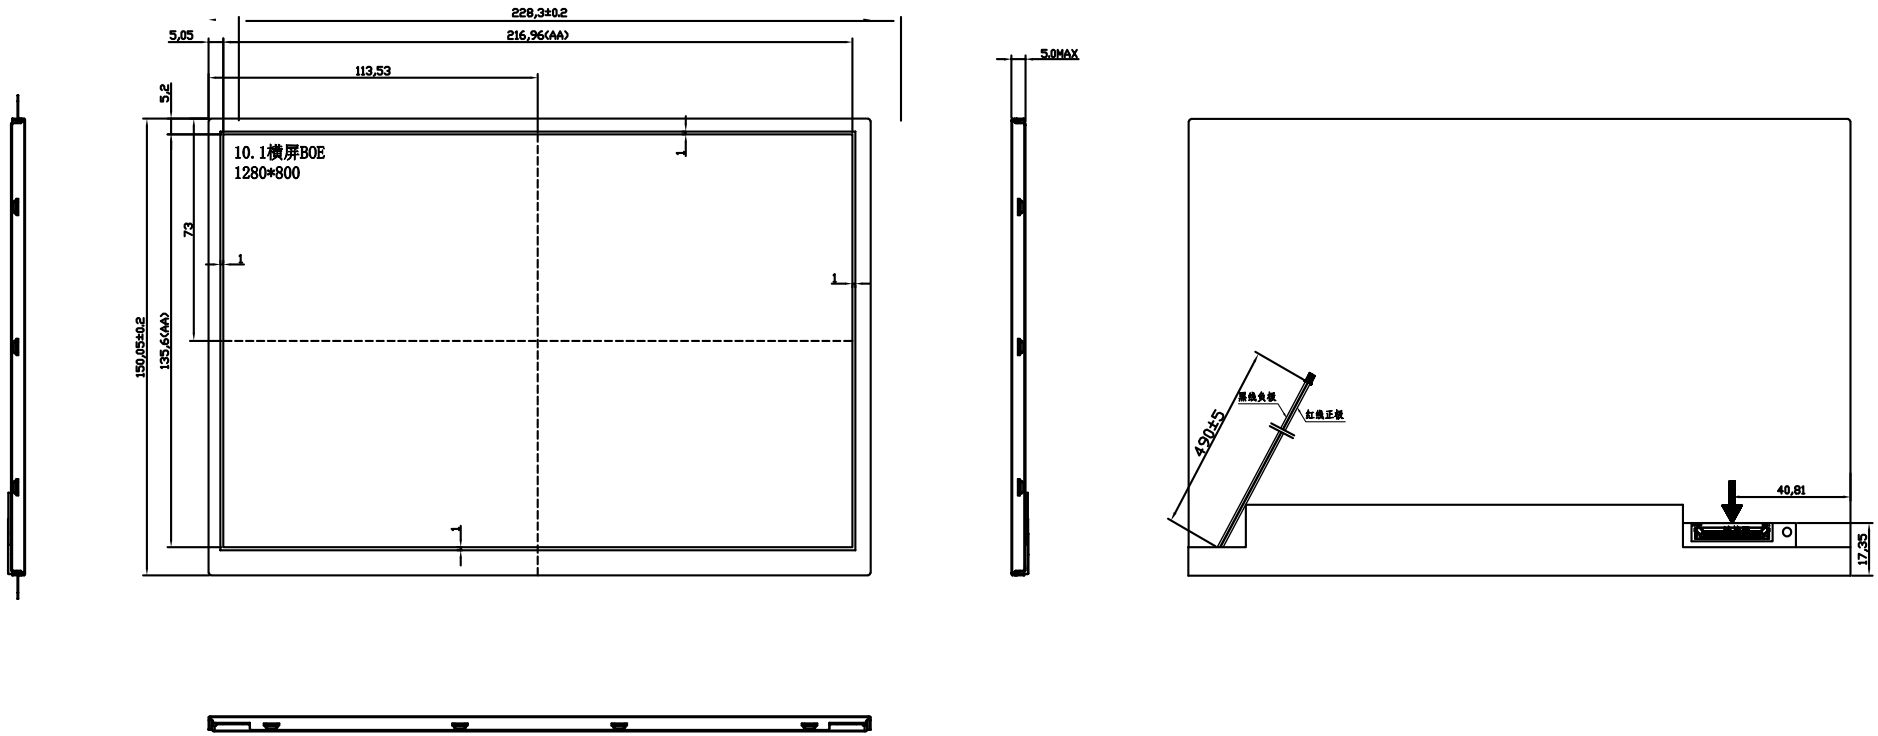

Notes:
1. Unit:mm.
2. Do not scale drawing.
3. All radii without dimension R0.2.
4. ⚠ Modification Mark.
5. draft angle: 1°
6. Backlight luminance : 1000 cd/㎡
7. Luminace uniformity: 75%(min)(min/max*100%)
8. UnSpecified Tolerance is ±0.2
9. Operation conditions :If= 280-360mA, Vf=16.8-19.8V(MAX)
   Color coordinate:X=0.27-0.35,Y=0.27-0.35
10. All materials comply with RoHS
11. The measured value of luminace and color coordinate bases FX's BM-7
12:Check item:1~9



Backlight 6串6并 36LED Circuit

NO.	TITLE	Quantity
11	FPC (软性线路板)	1
10	Double_sided stick (双面胶)	2
9	HOUSING (塑胶框)	1
8	PCB(印制电路板)	1
7	Wire(导线)	1
6	LED(发光二极体)	36
5	BEF(增光片)	2
4	Diffuser film(扩散片)	1
3	Light guide plate (导光板)	1
2	Reflector film(反射膜)	1
1	Rear iron frame (下铁框)	1

REV	DATE	DESCRIPTION (修改内容)	REVISER

Customer: 客 户		Approval Date: 确认日期		Approve by: 确 认	