


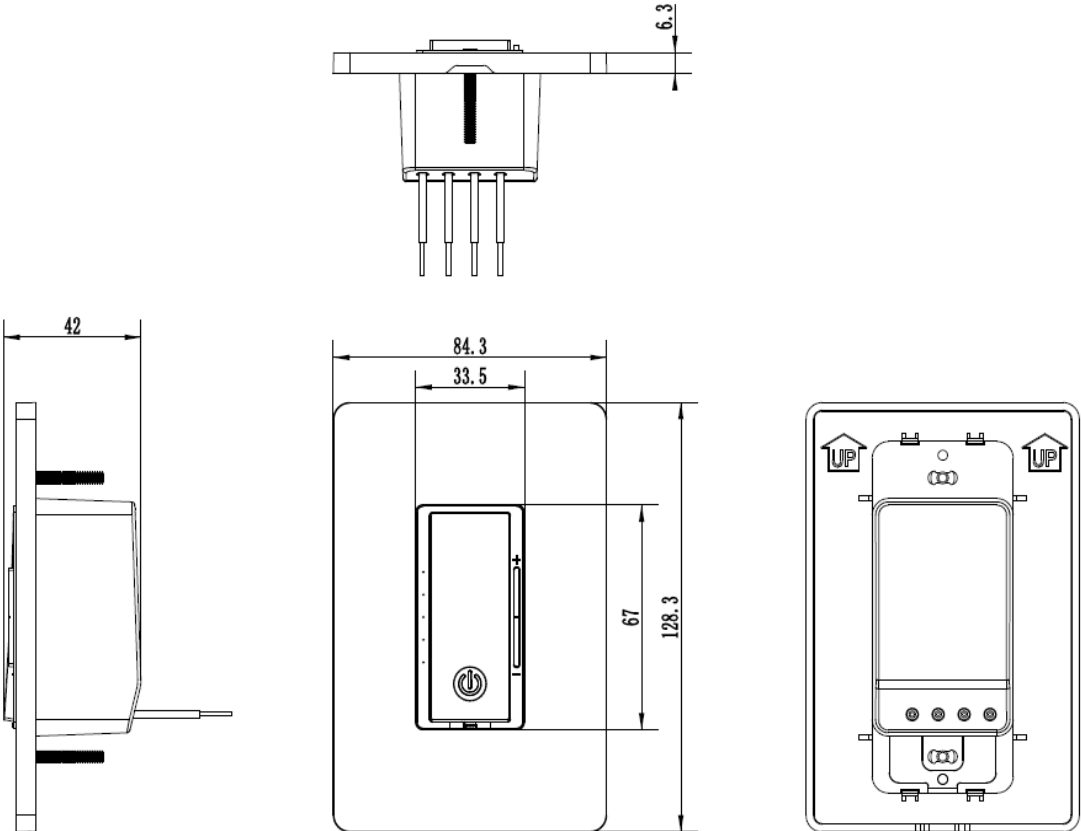

Win-Kare Technology Co., Ltd

Unit 305,Block B, Danzhutou Hi-Tech Park, No.58 Yuandun Road
Nanwan Street,Longgang District, Shenzhen, China Tel: 86 755 25003073

Specification			
Product Name	Wi-Fi Smart Dimmer Switch		
Models	BAK-009S		
Appearance			
Description	1.0% - 100% Dimmable: Adjust the desired brightness via phone app, voice control, or manually via the button. Brightness memory function is available for the last light setting when powered off. Supports up to 150W dimmable LED/CFL or 350W incandescent bulbs. Smart bulb can't be dimmed by the smart dimmer switch.		
	2.Control from anywhere - Turn electronics on or off from anywhere with your smartphone using the Smart Life app or Tuya app.		
	3.Voice Control - Works with Amazon Alexa, Google Assistant.		
	4.Scheduling - Use Schedules to set your smart switch to automatically turn on and off while you're home or away.		
	Note: NEUTRAL WIRE REQUIRED / single-pole use only (NOT 3-way) / Secured 2.4 GHz WiFi network connection.		
Size & Color	Size	128.3×42.3×84.3mm (with cover plate)	
	Color	White	
Material & Surface treatment	Enclosure	PC	Smooth surface
	Plate	PC	Smooth surface
Weight	128g		
Certification	cETLus		

Standard(s)	UL 1472、CSA C22.2#184.1		
Technical parameter	Load:Max. 350 W incandescent or Max. 150 W LED/CFL		
	Dielectric Voltage Withstand:1250VAC/1Min		
	Wifi:2.4G		
	Shell fire rating: UL94 V2		
	Operating temperature: 23~104°F(-5~40℃)		
	Voltage: 120VAC、60Hz		
	APP:Smart Life、Tuya		
Dimension & Assembly drawing	 The image contains three technical drawings of a smart switch. The top drawing is a top view showing a rectangular device with a central vertical slot and four screws at the bottom, with a dimension of 6.3 indicated. The bottom-left drawing is a side view showing the device's profile with a width dimension of 42. The bottom-right drawing is a front view showing the device's face with a central display area, a power button, and two UP arrows at the top, with dimensions 84.3, 33.5, 67, and 128.3 indicated.		