



AC 12025

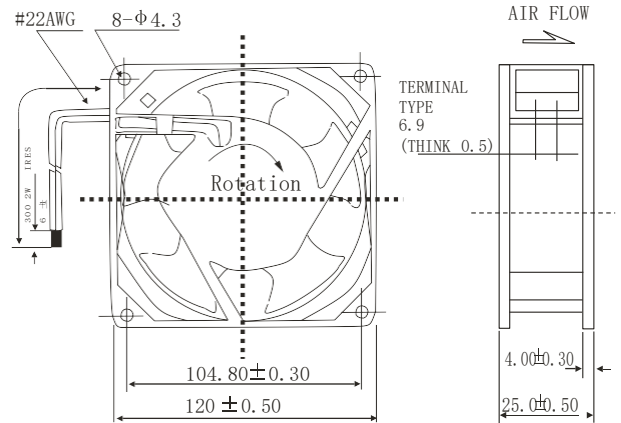

Dimensions (mm)

Size: 120X120X25mm
 Frame : Aluminum Painted& Plastic UL94V-0
 Impeller: Reinforced Plastic UL94V-0
 Bearings: Ball Bearing&Sleeve Bearing
 Life Expectancy: 50,000hours at 20°C-Ball
 30,000hours at 20°C-Sleeve
 Approvals: UL CE RoHS
 Weight: 380g

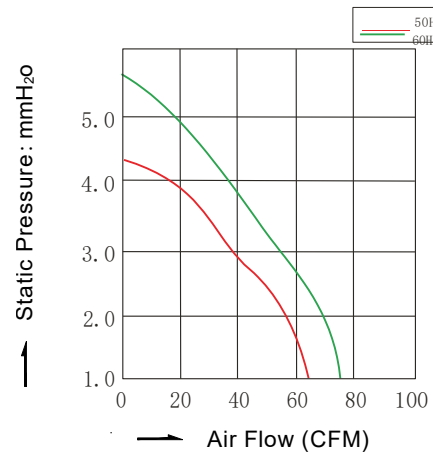

Air Flow vs Air Pressure

Performance

Model	Bearing *		Rated Voltage	Operating Frequency	Current	Input Power	Nominal Speed	Air Flow	Air Pressure	Noise
	S	B								
AF12025*A1H	✓	✓	110/120	50/60	0.14/0.12	19/16	2000/2300	60/65	4.85/5.65	37/39
AF12025*A2H	✓	✓	220/240	50/60	0.09/0.08	19/16	2000/2300	60/65	4.85/5.65	37/39
AF12025*A1M	✓	✓	110/120	50/60	0.12/0.10	17/15	1850/1950	55/60	3.65/4.70	36/38
AF12025*A2M	✓	✓	220/240	50/60	0.08/0.07	17/15	1850/1950	55/60	3.65/4.70	36/38
AF12025*A1L	✓	✓	110/120	50/60	0.12/0.10	15/13	1650/1800	46/51	3.10/3.75	34/36
AF12025*A2L	✓	✓	220/240	50/60	0.08/0.06	15/13	1650/1800	46/51	3.10/3.75	34/36