




Features & Picture:

- ◆ Vehicle Mini Metal Box Camera
- ◆ 1/3" SONY Color SuperHAD II Low Lux CCD
- ◆ Resolution: 550TVL, 650TVL
- ◆ Lens Optional: 2.5/2.8/3.6/6.0/8.0/12.0mm
- ◆ Pan/Tilt adjustment available
- ◆ Dimension: W41.8xH44.7xD28.5(mm)



Housing#: M09

Dimensions:

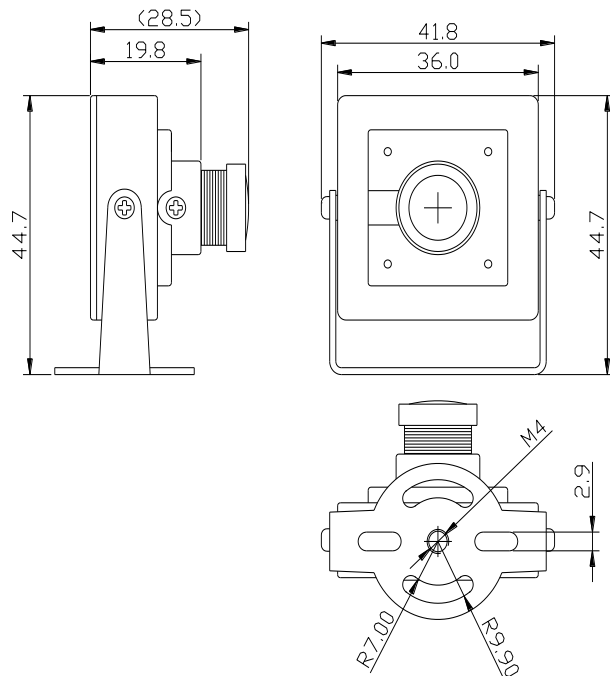

Specifications

Model	550ST-M09	650SN-M09	701SN-M09	1200CM-M09
Pick up Device	1/3" SONY Color SuperHAD II Low Lux CCD			1/3" SONY CMOS IMX138 Sensor
Signal Format	PAL or NTSC (color)			
Picture Elements	PAL:752(H)x582(V); NTSC:768(H)x494(V)		PAL:976(H)x582(V); NTSC:976(H)x494(V)	PAL:1280(H)x1024(V); NTSC:1280(H)x1024(V)
Horizontal Resolution	550TVL	650TVL	700TVL	1200 TVL(1.31 Mega pixels)
Sensitivity	0.05 Lux at F=1.2			0.001 Lux at F=1.2
Infrared LED	N/A			
Infrared LED Range	N/A			
Scanning System	PAL:625 TVL; NTSC:525TVL 2:1 Interlace			
Synchronization	Internal sync.			
Infrared Spectrum	N/A			
S/N Ratio	Over 50dB(AGC off)			
Auto Gain Control	Auto			
White Balance	Auto			
Electronic Shutter	Auto			
Back Light Compensation	Auto			
Video Output	1 Vp-p,75Ω Composite ,BNCx1			
Audio Output	N/A			
Mirror	Optional			
Gamma Ratio	0.45			
Auto-iris Lens Control	N/A			
Lens	f2.5mm~12mm			
Lens Mount	M12xP0.5mm Thread			
Exterior Focus	N/A			
Pan Adjusting	Available			
Tilt Adjusting	Available			
Power Supply	12V DC ±10%, ø 2.0mm DC Jack x1			
Power Consumption	70mA			
Dimensions(W x H x D)	W41.8xH44.7xD28.5(mm)			
Net Weight	120g			
Weatherproof/Waterproof	N/A			
Operating Temperature	-10°C to +50°C			

*Specifications are subject to change without prior notice