

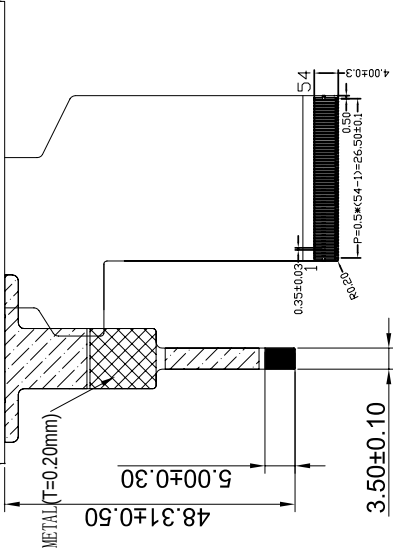


1	VBL-	32	R4
2	VBL-	33	R5
3	VBL+	34	R6
4	VBL+	35	R7
5	NC	36	HSYNC
6	NC	37	VSYNC
7	NC	38	DCLK
8	RESET	39	NC
9	SPENA	40	NC
10	SPCK	41	VCC
11	SPDA	42	VCC
12	B0	43	NC
13	B1	44	NC
14	B2	45	NC
15	B3	46	NC
16	B4	47	NC
17	B5	48	IF2
18	B6	49	IF1
19	B7	50	IF0
20	G0	51	NC
21	G1	52	DE
22	G2	53	GND
23	G3	54	GND
24	G4		
25	G5		
26	G6		
27	G7		
28	R0		
29	R1		
30	R2		
31	R3		

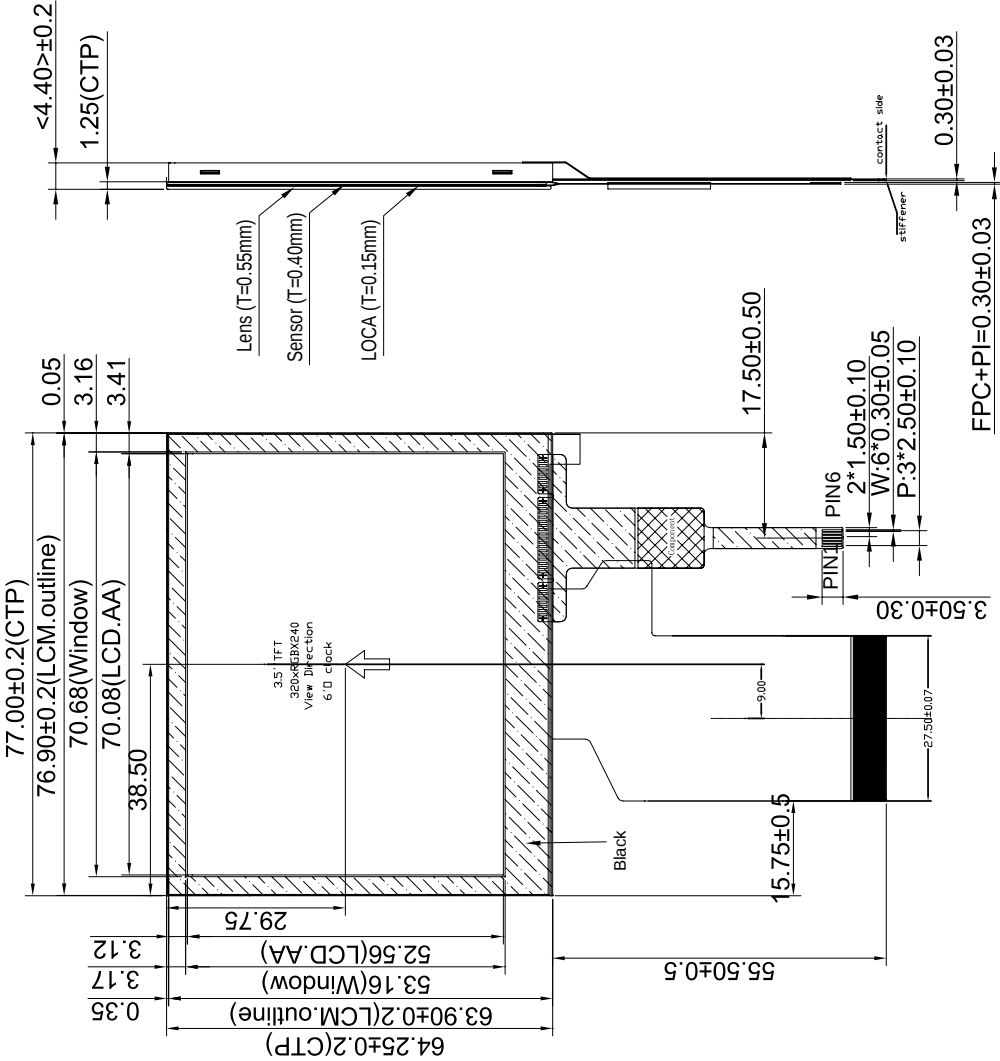

NOTES:

1. DISPLAY TYPE: TFT
2. MODULE SIZE: 3.5 Inch
3. OPERATING TEMPERATURE: -20°C~70°C
4. STORAGE TEMPERATURE: -30°C~80°C
5. LCM DRIVER IC: HX8238D
6. VIEWING DIRECTION: 6 o'clock
7. CTP Driver IC: GT911(10*15)
8. ROSH COMPLIANT
9. Unspecified tolerance is ±0.20mm

PIN	Logic
1	GND
2	INT
3	SDA
4	SCL
5	REST
6	VDD 3.3V

CUSTOMER APPROVE	

FORMIKE FORMIKE ELECTRONIC CO.,LTD.
深圳市科万宏电子有限公司
www.wandisplay.com

MODULE NO.	KWH035ST48-C01	VERTION:	A
MATERIAL NO.		SHEET:	1 OF 1
ISSUED	CHECKED	APPROVED	UNIT: MM
LEO	ZENG	LIU	DATE: Jun-28-2018