


APPROVED

SIGNATURE

DATE

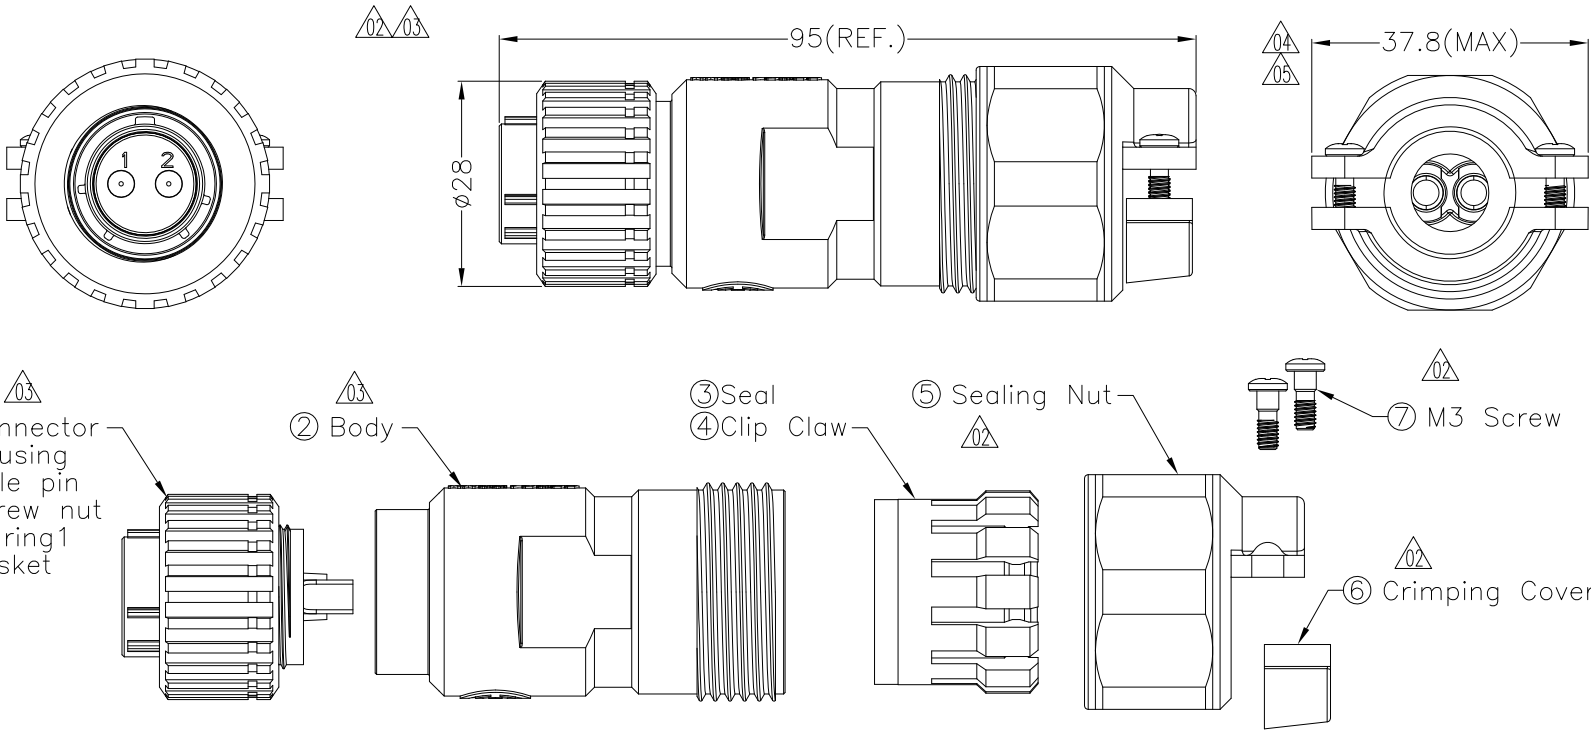

Explosion View

Note:
*Waterproof rating:IPX7
Material
①Connector: M20 male pin, 2pin solder type.
*Housing: Nylon+GF,black.
*Male pin: Copper alloy,gold plated.
*Screw nut: ZINC alloy,electro-coating,black.
*O-Ring1: Silicone, black.
*Gasket: Silicone, gray.

②*Body: ZINC alloy,electro-coating,black..
③*Seal: Silicone, gray.
④*Clip Claw: Nylon,Black.
⑤*Sealing Nut: ZINC alloy,electro-coating,black.
⑥*Crimping Cover: ZINC alloy,electro-coating,black.
⑦*M3 Screw: Stainless steel,black.

Recommendation:
*Wire range:8#
*Cable OD range:17mm.

Electrical Characteristics:
*Rated Current : 40A.
*Rated Voltage : 60V AC/DC.



UNIT:mm		TOLERANCE		TITLE		M20 2PIN 40A ASSEMBLY		TiMyn		TM-11D-02C-N1		DRAWN BY		DATE	
±0.5mm				SCALE		Free		SHEET		CUSTOMER DWG NO		CHECKED BY		DATE	
				REV.		05		SIZE		CUSTOMER		APPROVED BY		DATE	
				A4		QC		Inspection Item				Roy		2020/09/24	