


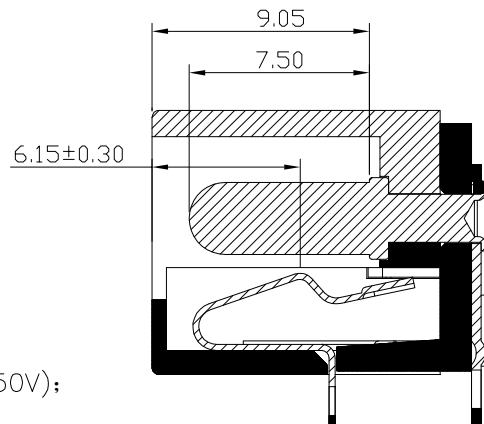
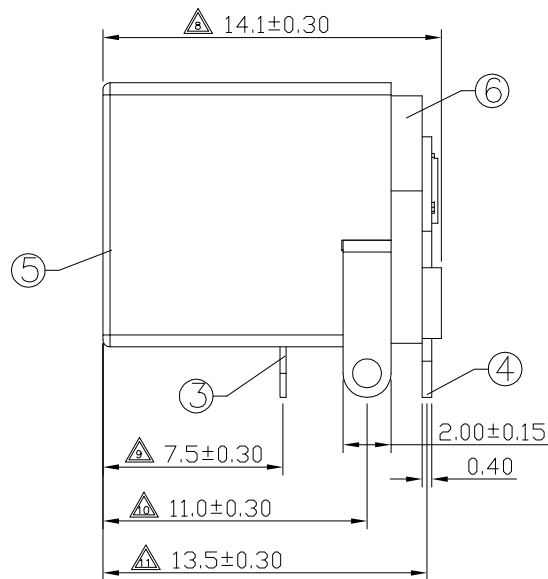



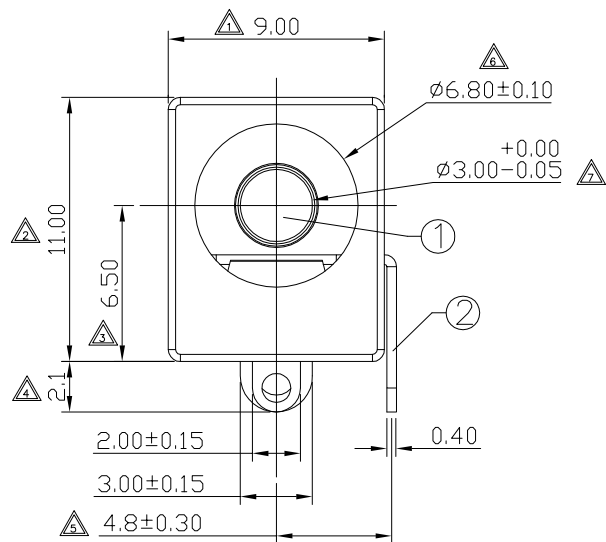

SCHEMATIC



P.C.B LAYOUT
TOP VIEW

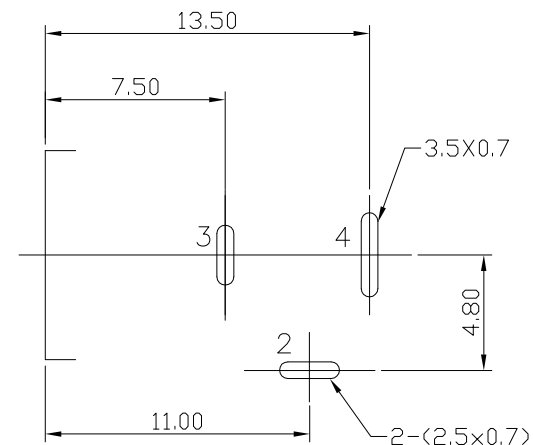

RoHS
Compliant

Level-1 Controlled Substances are banned

SPECIFICATION

- 1.Rating : DC 30V 1.0A;
- 2.Contact resistance: $\leq 0.03\Omega$;
- 3.Insulation resistance: $\geq 100M\Omega$ (DC250V);
- 4.Withstand voltage: 500V/AC ;
- 5.Insertion and extraction force: 3-30N;
- 6.life test: 5,000 cycles.
- 7.Marked $\triangle$ are important dimensions.

6	COVER	1	LCP	—	—
5	HOUSING	1	LCP	—	—
4	FLAT FOOT	1	BRASS	—	Ag-Plating
3	SPRING PIECE	1	BRONZE	—	Ag-Plating
2	CURVE PIECE	1	BRASS	—	Ag-Plating
1	PIN	1	BRASS	—	Ni-Plating
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK

GENERAL TOLERANCE
UNLESS OTHERWISE SPECIFIED

General	Angle
X ± 0.50	X $\pm 3^\circ$
XX ± 0.30	XX $\pm 2^\circ$
XXX ± 0.20	XXX $\pm 1^\circ$
XXXX ± 0.10	



盛聰电子有限公司
SHENG CONG ELECTRONIC CO.,LTD

CUSTOMER
COPY

TITLE:

DC-JACK

PART NO.

DJ-D005F-2

PROJ:

SCALE: 1:1

UNIT:mm

SIZE: A4

SHEET: 1 OF 1