




Front view




Side View




Rear View

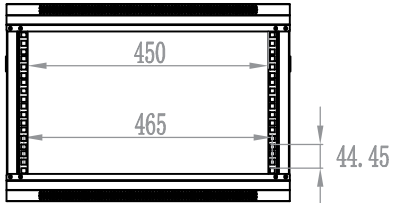

Mounting Dimension

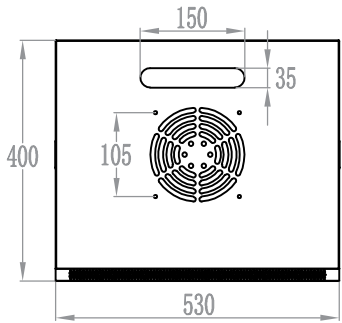

Top View

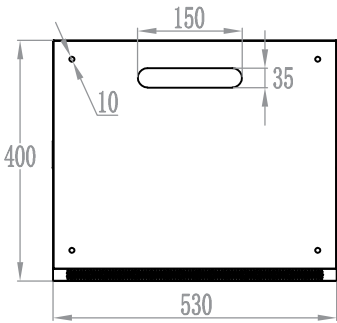

Bottom View

Model Type	Capacity	Cabinet Height (H ₁)	Panel Height (H ₂)	Wall-Mounted Hole Distance (H ₃)
ML6404S	4U	200	120	80
ML6406S	6U	300	220	140
ML6409S	9U	450	370	290
ML6412S	12U	600	520	440

Instructions:

- Drawing size unit:mm;
- Standard:Comply with IEC297-2, GB/T4208-2017, GB4943.1-2011, JB/T 10216-2013;
- Install size: The network cabinet standard is 19-inch, install width 483mm±2mm, distance of edge of vertical beam 465mm, distance between bars and rear panel 450mm;
- Color: Black, meet the customized;
- Type of door: Steel front door, rear panel can be open, other types meet the customized;
- IP standard: IP20;
- The instructions of installation: The cabinet designed to be attached to the wall and floor standing, the panels has holes on the top, bottom and rear, collect wires more convenient, the wall-mount network cabinet has wall-mounted hole, 4 pieces of 10mm expansion screws hang on the wall.

Designer		 河北华腾亿州电气设备有限公司 Heibei HuaTengYiZhou Electrical Equipment Co., Ltd.	
Auditor			
Standard		400D Series Wall-Mounted Network Cabinet	Edition: V1.0
Approver			Ratio: 1:10
Date			Page 1, Total 1 pages