

贯流风机

CROSS FLOW FANS



产品应用

空气净化器、臭氧发生器、加湿器、除湿机
电源装置、投影仪、复印机、小型变压器
冷却风机、暖风机、车载冷气机、干手机、冷藏品展示柜
微波炉、电饭煲、电热器、燃气壁炉、烘干机
电讯机柜等

产品特征:


运行低噪音
大风量
风口为窄而长的条形封口
铝制叶轮、钢制外壳
内转子电机或罩极电机驱动

Product application:

Air Cleaner, IonGenerator, Ozonizer, Dehumidifier, Humidifier
Power Source Device, Projector, Copy Machine,
Small Transformer
Cooling Fan, Warmer, Car Ventilation, Hand Dryer,
Freezing Show Case
Micro Wave, Electrical Cooker, ectric Warmer,
Gas Fireplaces, Air Circulator
Tele communication Equipment or facilities

Product features:

Low Noise
Much Air Volume
Blow Narrow Space and Long Distance
Aluminum Impeller and Steel Housing
PSC motor or Shaded pole motor

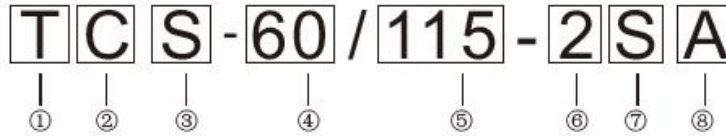

1.T: Changzhou Trustec Co.,Ltd (常州拓昂电气设备有限公司)

2.Fan type (风机形态)

S:CROSS FLOW FANS (贯流风机)

A:Air curtain (风幕机)

3.Motor Type (电机形态)

C:Capacitor type induction motor (内转子电机)

S:Shade pole motor (罩极电机)

4.Impeller size (叶轮直径)

5.Impeller length (叶轮长度)


6.Number of pole:2,4,6,8 pole
(电机极数:2,4,6,8级)

7.Casing material

外壳材质:S:Steel镀锌板

8.Impeller material

叶轮材质:A:Aluminium铝板

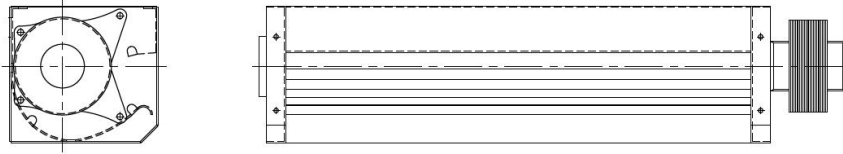

技术参数 Technical parameters:

型号 Model	频率 (Frequency:Hz)	电压/相 (Volt/Phase)	电机功率 (Motor Power:W)	输入功率 (Power Input:W)	电流 (Ampere:A)	转数 (Revolution: RPM)	风量 (Air Volume: m ³ /h) MAX	静压 (Static Pressure: mmHg) MAX	噪音 (Noise:dB) MAX	重量 (Weight:Kg)
TSO-120/60-2PS	50	220/1 φ	15	12	0.10	1600	90	2	45	1.5
	60	220/1 φ	15	12	0.17	2300	120	4	48	1.5
TSO-133/60-2PS	50	220/1 φ	18	19	0.17	1700	144	2	42	2
	60	220/1 φ	19	27	0.24	2200	186	4	45	2
TSO-146/60-2PS	50	220/1 φ	24	25	0.20	1600	180	2	43	2
	60	220/1 φ	24	34	0.27	2300	252	4	47	2
TSO-160/60-4PS	50	220/1 φ	34	35	0.28	1600	252	2	45	3
	60	220/1 φ	34	37	0.37	2300	348	4	48	3

备注：以上是具有代表性的风机，可按客户要求制定各种尺寸的风机。

Note: Listed is representative fan, only for reference. Dimension can be customized according to customer requirement.