


Model: FC-7616

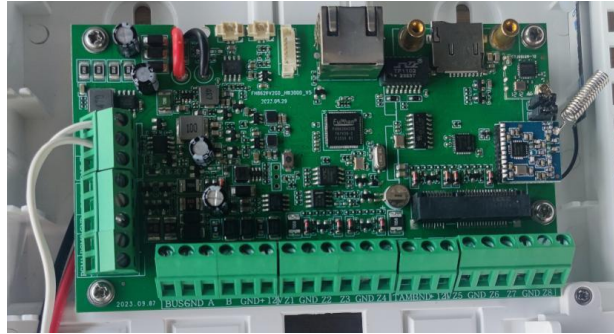

Product Description

Network Video Alarm Panel

Product parameter:

| | |
|-----------------------------------|--|
| Model | FC-7616 |
| Operating system | Embedded Linux |
| User interface | IE browser, CMS client, App(iOS/Android) |
| Audio format | Supports G711 bidirectional voice |
| Video format | H.264/H.265 |
| Network interface | 10M/100M adaptive network interface |
| Modulation mode | FSK two way |
| Wireless working frequency | 2.4G, 433/868MHz (optional) |
| Supporting protocols | Ademco Contact ID, SIA TCP/IP, onvif protocol(compatible with onvif camera from the 3 rd party suppliers) |
| Channel support | 4 channels |
| Number of devices | Supports 64 wireless detectors, 8 wired detectors, 32 single bus detectors, 8 remote controls, 8 wired keyboards, 1 wired siren, 4 two way sirens, 2 PGM outputs |
| 4G module (optional) | EU, US, CN, SA optional |
| SIM card type | Micro SIM |
| Network support | Ethernet, WiFi, 4G |
| WiFi protocol | 802.11 b/g/n |
| TF card | Support max.128G standard TF card |
| Power input | DC 12V input |
| Product Size | (D)245*(W)180*(H)245mm |
| Operating temperature | -10℃~50℃; Humidity<90%RH |

Package Includes

1*Panel, 1*Screw pack, 1*adapter, 1*User manual.

Warranty

Product Warranty period(Worldwide): 24 months