确认此坐标所有图纸：签名确认：	REV	DESCRIPTION	MODIFY BY	DATE
	11	新 图	CHW	2022-07-1

RoHS

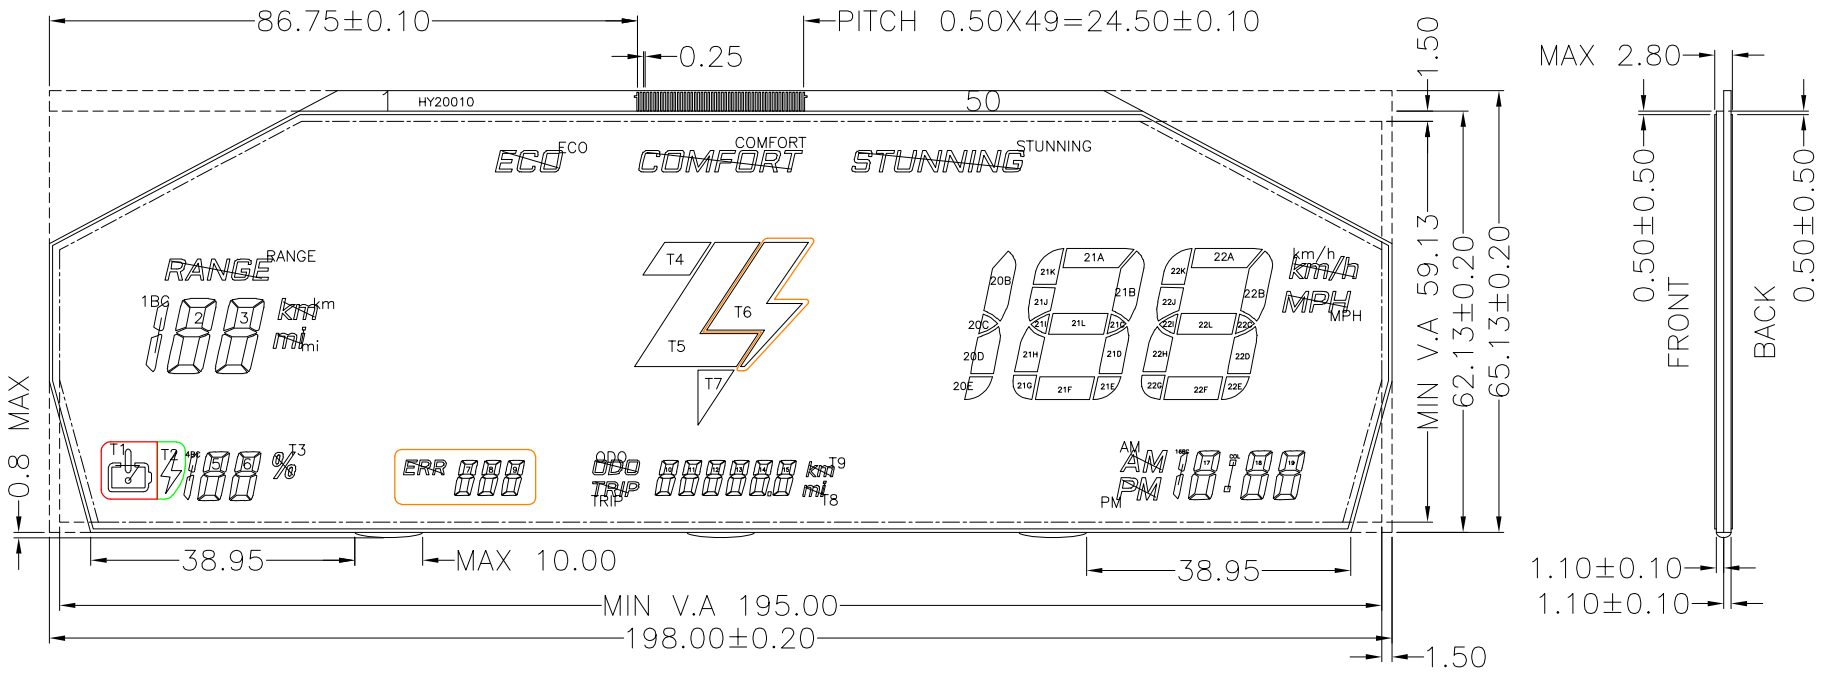

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
--	NC	NC	SEG1	SEG2	SEG3	SEG4	SEG5	SEG6	SEG7	SEG8	SEG9	SEG10	SEG11	SEG12	SEG13	SEG14	SEG15	SEG16	COM4	COM3	COM2	COM1	SEG17	SEG18
COM1	--	--	9D	9E	8D	8E	7D	7E	6D	6E	5D	5E	RANGE	2F	2A	3F	3A	ECO	--	--	--	COM1	20B	21K
COM2	--	--	9C	9G	8C	8G	7C	7G	6C	6G	5C	5G	1BC	2G	2B	3G	3B	PM	--	--	COM2	--	20C	21J
COM3	--	--	9B	9F	8B	8F	7B	7F	6B	6F	5B	5F	T1	2E	2C	3E	3C	AM	--	COM3	--	--	20D	21I
COM4	--	--	9A	TRIP	8A	ODO	7A	ERR	6A	T3	5A	4BC	T2	km	2D	mi	3D	COMFORT	COM4	--	--	--	20E	21H

PIN	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
--	SEG19	SEG20	SEG21	SEG22	SEG23	SEG24	SEG25	SEG26	SEG27	SEG28	SEG29	SEG30	SEG31	SEG32	SEG33	SEG34	SEG35	SEG36	SEG37	SEG38	SEG39	SEG40	SEG41	SEG42	NC	NC
COM1	21A	21B	22K	22A	22B	DP	19D	19E	18D	18E	17D	17E	15D	15E	14D	14E	13D	13E	12D	12E	11D	11E	10D	10E	--	--
COM2	21L	21C	22J	22L	22C	STUNNNG	19C	19G	18C	18G	17C	17G	15C	15G	14C	14G	13C	13G	12C	12G	11C	11G	10C	10G	--	--
COM3	21F	21D	22I	22F	22D	km/h	19B	19F	18B	18F	17B	17F	15B	15F	14B	14F	13B	13F	12B	12F	11B	11F	10B	10F	--	--
COM4	21G	21E	22H	22G	22E	MPH	19A	--	18A	COL	17A	16BC	15A	T8	14A	T9	13A	T6	12A	T7	11A	T5	10A	T4	--	--

可视区内有交点：0.05mm*0.05mm

NOTES:

1. DISPLAY TYPE: VA
2. LCD OPERATING VOLTAGE: 4.5V
3. OPERATING TEMPERATURE: -20°C~70°C
4. STORAGE TEMPERATURE: -30°C~80°C
5. DRIVE MODE: 1/4D,1/3B
6. VIEWING DIRECTION: 6 :00
7. POLARIZER TYPE: TRANSMISSIVE(防UV或紫外线), NEGATIVE
8. CONNECTOR: FPC
9. CUSTOMER NO: 客图/HY20010
10. PRINT: COLOUR/ YES 3
11. Unspecified tolerance is ±0.20mm

深圳金视界光电科技有限公司
SHENZHEN GOLDEN VISION OPTOELECTRONIC CO.,LIMITED

SCALE:1/1	UNIT:mm	DATE		PAGE:1/1	VER:V1.
MODEL NO.:	GVHV213057M			APPROVE	CHECK	DESIGNE
PART NO.:					