PRODUCT & SPEC.FROM BROTHERS-Y

PRODUCT & SPEC.		24AWG CAT5e UTP
INDESIDE		4P
CONDUCTOR	Configuration	4X2X0.5mm±0.015
	Material	BARE COPPER
	Work datapss	160-180M
INSULATION	Material	HDPE
	PE OD	Φ0.91±0.05mm
PAIRED PITCH	blue/blue&white	12mm
	Orange /Orange &white	16mm
	green/green&white	14mm
	Brown/Brown&white	18mm
OTHERS	RIPCORD	Nylon
	GROUND	/
	PACKAGE	305M/BOX
SKIN	Material	PVC
	color	optional
	PVC OD	5.0mm±0.2MM
	PVC Thickness	0.51±0.03mm
	SERFACE	SMOOTH
PERFORMANCE	conductor resistanceΩ /100m.20℃	≤9.1Ω
	Conductor allow load current(A)	0.5A
	voltage rating(V)	≤30V
	operating temperature (℃)	—20℃~75℃
PRINTING	BROTHERS-Y COMMUNICATIONS CABLE 4/24AWG CAT 5E UTP VERIFIED TO TIA/EIA 568B.2 & ISO/IEC 11801 001-305M	

CONFIGURATION

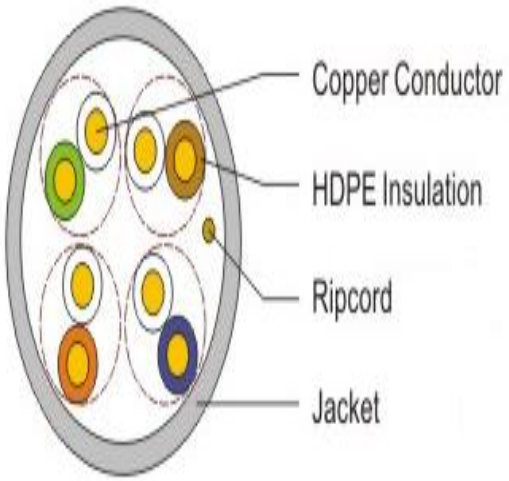

Inside cable sequence：Blue/Blue&White, Orange /Orange &White, Green/Green&White, Brown/Brown&White.

Shenzhen Brother Young Development Co.,Ltd
Add: NO.38 Jiangjunmao Industrial Zone, Wulian, Longgang District, Shenzhen, China.
Phone:+86-755-85232320 Fax：+86-755-85232120
URL: www.brothers-ycable.net