


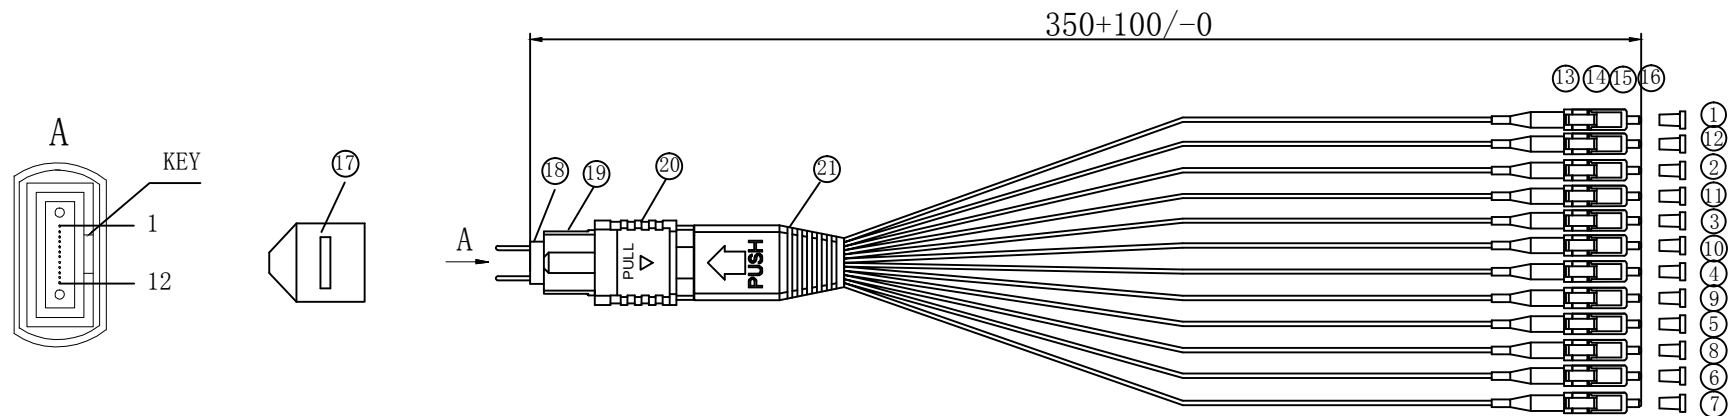

WIRING TYPE			
1	1	Blue	
2	2	Orange	
3	3	Green	
4	4	Brown	
5	5	Gray	
6	6	White	
7	7	Red	
8	8	Black	
9	9	Yellow	
10	10	Violet	
11	11	Pink	
12	12	Turquoise	

MPO水绿色头型 扇港的 公头
LC端紫红色连接头 白色尾套+数字环识别
OM4 12色0.9光缆
接线方式 A类 1：1
长度0.35米

21	MP0 Black Boot	1	
20	Housing Aqua	1	
19	Plastic Body Black	1	
18	MP0 Male Ferrule With 2 Pcs Pin	1	
17	MP0 Black Dust cover	1	
16	LC White Dust Cap	12	
15	LC MM Ferrule	12	
14	LC OM3 Connector Aqua	12	
13	LC 0.9 Boot Aqua	12	
12	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm Turquoise LSZH	0.35m	
11	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm Pink LSZH	0.35m	
10	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm Violet LSZH	0.35m	
9	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm Yellow LSZH	0.35m	
8	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm Black LSZH	0.35m	
7	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm RED LSZH	0.35m	
6	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm White LSZH	0.35m	
5	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm Gray LSZH	0.35m	
4	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm Brown LSZH	0.35m	
3	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm Green LSZH	0.35m	
2	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm Orange LSZH	0.35m	
1	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm Blue LSZH	0.35m	
NO	SPECIFICATION STANDARD	QT' Y	REMARK

Note:
Test:

Type	Multi-Mode	
	MPO/PC	LC/UPC
Insertion Loss	≤ 0.75dB	≤ 0.25dB
Return Loss	≥ 20dB	≥ 25db
Test Wavelength	850nm	