

Amphenol connector to 3xAmphenol connector breakout cable assembly/Amphenol连接器对3xAmphenol连接器分支电缆组件

Product photo/产品图



Part number/产品料号

Part number

BPL003

Amphenol connector cable / Amphenol 连接线

Product photo/产品图



Part number/产品料号

Part number("X" is length millimetre mm)/产品料号("X"表示长度, 单位毫米mm)

AMPL216-X

Amphenol connector to M12 4pins A code male right angle cable /Amphenol连接器对M12, 4针A型公头弯头连接线

Product photo/产品图



Part number/产品料号

Part number("X" is length millimetre mm)/产品料号("X"表示长度, 单位毫米mm)

12AMPL001-X

Amphenol connector to M12 4pins female straight cable /Amphenol连接器对M12,4针母头直头连接线

Product photo/产品图



Part number/产品料号

Part number("X" is length millimetre mm)/产品料号("X"表示长度,单位毫米mm)

12AMPL002-X

Amphenol connector to D-sub 9pins connector cable /Amphenol连接器对D-sub,9针连接线

Product photo/产品图



Part number/产品料号

Part number("X" is length millimetre mm)/产品料号("X"表示长度,单位毫米mm)

AMPDSUBL001-X

Amphenol connector to TE cable /Amphenol连接器对TE连接线

Product photo/产品图



Part number/产品料号

Part number("X" is length millimetre mm)/产品料号("X"表示长度,单位毫米mm)

AMPTEL001-X

Amphenol connector to solenoid valve cable /Amphenol连接器对电磁阀连接线

Product photo/产品图



Part number/产品料号

Part number("X" is length millimetre mm)/产品料号("X"表示长度, 单位毫米mm)

AMPSVL001-X

Amphenol to 2xfuse connectors cable assembly/Amphenol 对2个保险连接器连接线

Product photo/产品图




Part number/产品料号

Part number("X" is length millimetre mm)/产品料号("X"表示长度, 单位毫米mm)

AMPFUSEL001-X

Amphenol AT06-4S to Switchcraft TS2C5F20C cable/Amphenol AT06-4S对Switchcraft TS2C5F20C连接线

Product photo/产品图

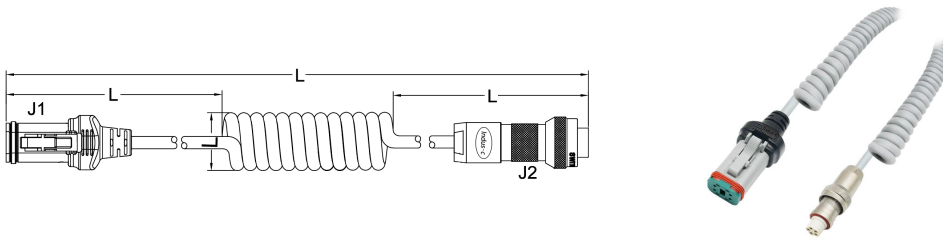


Part number/产品料号

Part number/产品料号

AMPSWL001-X


Connection diagram/连接图



M12 B code 5pin female connector with shield to Amphenole AT04-08PA cable/M12,B型5孔母头连接器带屏蔽对Amphenole AT04-08PA连接线

Scale drawing/尺寸图

Product photo/产品图




Part number/产品料号


Pins/针数	Code/型	Part number("X" is length millimetre mm)/产品料号("X"表示长度, 单位毫米mm)
5pins/5孔	B code/B型	12AMPL00003-X

Pin assignment front view/针位分布前视图

B code 5pins
B型5孔



Connection diagram/连接图

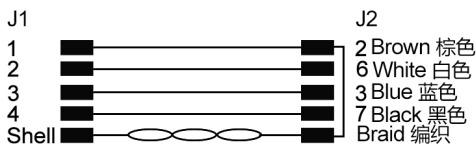


General data/常规数据

Pin numbers/针数	5pins/5针
Rated voltage/额定电压	30V
Rated current(40°C)/额定电流	2A
Standards/标准	IEC 61076-2-101
Connector locking system/锁紧方式	Screw-locking/螺丝锁紧
Degree of protection/防护等级	IP67
Wire gauge(mm²)/线规(平方数)	0.14mm²-0.34mm²
Wire gauge(AWG)/线号(平方数)	26AWG-22AWG
Mechanical operation/插拔次数	>100 mating cycles/大于100次
Ambient temperature (operation)/操作温度	-25°C~+85°C
Contact resistance/接触电阻	≤5mΩ
Insulation resistance/绝缘电阻	>100MΩ
Connector body/胶芯	TUP
Pin/端子	Phosphorus copper with gold plated/磷铜镀金
Nut and shell/螺母和铜壳	Brass with nickel plated/黄铜镀镍
Gasket/胶圈	Fluorine ring/氟胶圈
Black glue/黑色胶水	Epoxy resin/环氧树脂
Customs tariff number/海关编码	8538900000
Environmental compliance/环境符合标准	RoHS, Reach

M12 A code 8pin female connector to Amphenole AT04-6P-BLK cable/M12,A型8孔母头连接器对Amphenole AT04-6P-BLK连接器线

Scale drawing/尺寸图

Product photo/产品图




Part number/产品料号

Pins/针数	Code/型	Part number("X" is length millimetre mm)/产品料号("X"表示长度, 单位毫米mm)
8pins/8孔	A code/A型	12AMPL00004-X

Pin assignment front view/针位分布前视图

A code 8pins
A型8孔



Connection diagram/连接图



General data/常规数据

Pin numbers/针数	8pins/8针
Rated voltage/额定电压	30V
Rated current(40°C)/额定电流	2A
Standards/标准	IEC 61076-2-101
Connector locking system/锁紧方式	Screw-locking/螺丝锁紧
Degree of protection/防护等级	IP67
Wire gauge(mm²)/线规(平方数)	0.14mm²-0.34mm²
Wire gauge(AWG)/线号(平方数)	26AWG-22AWG
Mechanical operation/插拔次数	>100 mating cycles/大于100次
Ambient temperature (operation)/操作温度	-25°C~+85°C
Contact resistance/接触电阻	≤5mΩ
Insulation resistance/绝缘电阻	>100MΩ
Connector body/胶芯	TUP
Pin/端子	Phosphorus copper with gold plated/磷铜镀金
Nut and shell/螺母和铜壳	Brass with nickel plated/黄铜镀镍
Gasket/胶圈	Fluorine ring/氟胶圈
Black glue/黑色胶水	Epoxy resin/环氧树脂
Customs tariff number/海关编码	8538900000
Environmental compliance/环境符合标准	RoHs, Reach