Item	Date	Remark
A	20150707	Original Drawing

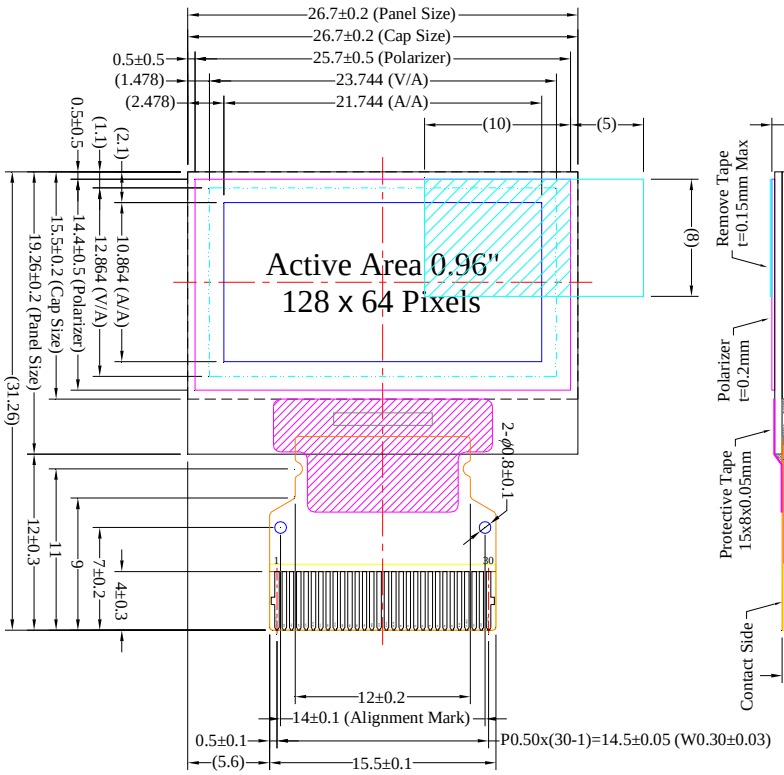

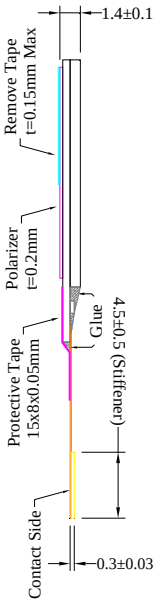

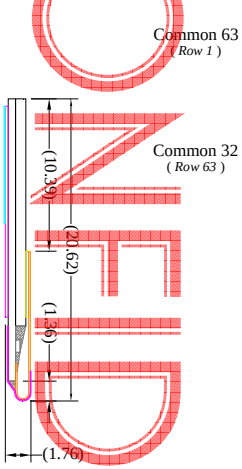

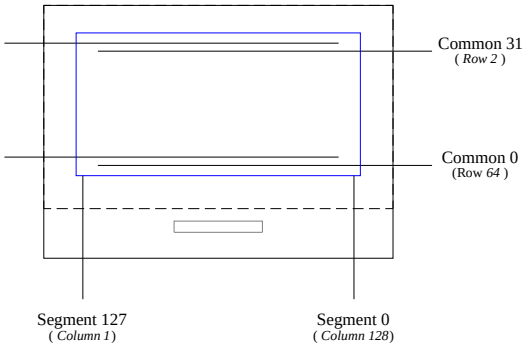



Detail "A"
Scale (10:1)

Pin	Symbol
1	N.C. (GND)
2	C2P
3	C2N
4	C1P
5	C1N
6	VBAT
7	N.C.
8	VSS
9	VDD
10	BS0
11	BS1
12	BS2
13	CS#
14	RES#
15	D/C#
16	R/W#
17	E/RD#
18	D0
19	D1
20	D2
21	D3
22	D4
23	D5
24	D6
25	D7
26	IREF
27	VCOMH
28	VCC
29	VLSS
30	N.C. (GND)

Notes:

1. Color: White/Blue
2. Driver IC: SSD1306
3. FPC Number: UT-0206-P15
4. Interface:
   8-bit 68XX/80XX Parallel, 3-/4-wire SPI, I2C
5. General Tolerance: ±0.30
6. The total thickness (1.5 Max) is without polarizer protective film & remove tape.
   The actual assembled total thickness with above materials should be 1.75 Max.

Customer Approval Signature	Good Light Company					Drawing Number	Rev.
						DMX2864CNGFEJ	A
	Unless Otherwise Specified		Title	2864KxxEG05 Folding Type OEL Display Module Pixel Number: 128 x 64, Monochrome, COG Package		Material	
	Unit	mm				Soda Lime / Polyimide	
	General Roughness						
	Tolerance			Drawn	E.E. / Panel / P.M.	Scale / Sheet / Size	
	Dimension	±0.3	By	Fanny Shen	Ting-Kuo Hu / Gary Lin / Tiffany Hsu	1:1 / 1 of 1 / A3	
	Angle	±1	Date	20150707	20150707 / 20150707 / 20150707		

CONFIDENTIAL