
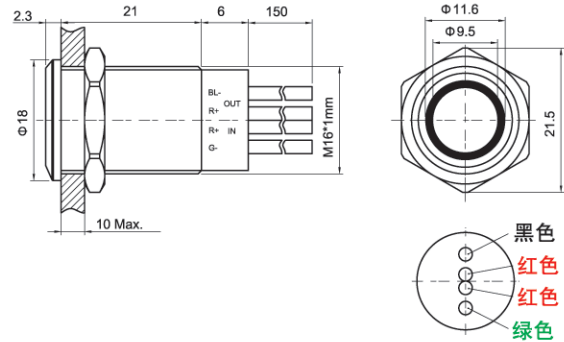


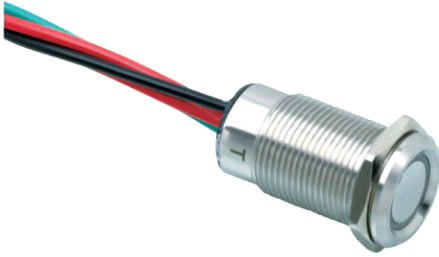

型号说明 Model Explanation

系列 Series	头部形状 Head Shape	功能 Function	带灯类型 Lamp Type	带灯颜色/按钮颜色 LED Color	带灯电压 Voltage	外壳材料 Shell Material
16T 19T 22T	F 平形 Flat C 凹圆形 Concave P 超平形 Plane	1 2 3 4 5 6	D 单点 Dot E 环形 Ring	R 红色 Red Y 黄色 Yellow B 蓝色 Blue G 绿色 Green W 白色 White 可以做任意颜色的灯, 双色灯等 Can make to order any other color lamp, double color lamp, etc	AC/DC 6 V 12 V 24 V	N 黄铜镀镍 Brass Nickel Plated J 黄铜镀金 Gold-plated Brass S 不锈钢 Stainless Steel A 锌铝合金 Zn-Al Alloy 锌铝合金材质可以做任意颜色外壳 Zn-Al alloy material can be customized any color body

功能说明 Functional Specifications

NO	工作模式 Work Pattern			亮度记忆 Brightness Memory	功能 Function
	CS1	CS1	CS1		
1	VDD	VDD	VDD	×	*ON/OFF, 长时间按压为无级调光, 1路输出 Long time pressure is stepless adjustable light, No.1 line output*
2	VDD	VDD	GND	√	*ON/OFF, 长时间按压为无级调光, 1路输出 Long time pressure is stepless adjustable light, No.1 line output*
3	VDD	GND	VDD	×	*ON/OFF, 长时间按压为无级调光, 2路输出 Long time pressure is stepless adjustable light, No.2 line output*
4	VDD	GND	GND	√	*ON/OFF, 长时间按压为无级调光, 2路输出 Long time pressure is stepless adjustable light, No.2 line output*
5	GND	GND	VDD		*三段调光 Three kinds of brightness (10%-40%-100%) *
6	GND	GND	GND		*三段调光 Three kinds of brightness (100%-40%-10%) *

注: 请仔细阅读产品具体说明后, 根据不同符号在该表中选取相应代号。

Note: Please read carefully the product details, according to the different symbols to select the corresponding code.

产品参数 Technical Parameters

产品规格	Product Standards					
开关规格	Switch Rating	1A 24V	材料 Material	按键	Button	黄铜镀镍 Brass nickel plated 不锈钢 Stainless steel 锌铝合金(定做任意颜色) Zn-Al alloy (Made to order any color)
绝缘电阻	Insulation Resistance	≥ 1000MΩ		外壳	Body	黄铜镀镍 Brass nickel plated 不锈钢 Stainless steel 锌铝合金(定做任意颜色) Zn-Al alloy (Made to order any color)
绝缘强度	Dielectric Strength	2000VAC/min		底座	Base	PBT
环境温度	Environment Temperature	-20℃~+55℃	带灯部分参数 Lamp Parameter	额定电压	Rated Voltage	6V. 12V. 24V
电气寿命	Electrical Life	>200,000 次 times		灯珠颜色	Color	R O Y G B W
螺母厚度	Panel Thickness	1~10mm		灯珠寿命	Life	50000 小时 Hours
螺母扭矩	Nut Torque	5~14Nm				