

4G Video Intercom & PMS

Experience wireless communication
NO wiring needed, No WIFI issues

SS2012




Features:

- ◆ Call out button, call-in to the administrator
- ◆ 4G IP videophone
- ◆ Instant videocall to mobile app
- ◆ 24/7 video recording
- ◆ Face detection alarm
- ◆ Max. 1000 room numbers.
- ◆ Max. 1000 Mifare cards (optional)
- ◆ Max. 2000 PIN codes
- ◆ 4G LTE/3G/GSM network
- ◆ 1080P H.265 video
- ◆ 2-way audio
- ◆ SD card storage up to 128GB
- ◆ Power: DC 12V-18V 1A

APP (Door intercom):

- Add/delete/modify user's room number/phone number/password/ Mifare card.
- Unlock door remotely via APP
- Manage multiple devices
- Play video record
- Check log of unlocking
- Door unlock/lock notifications and offline alert to APP

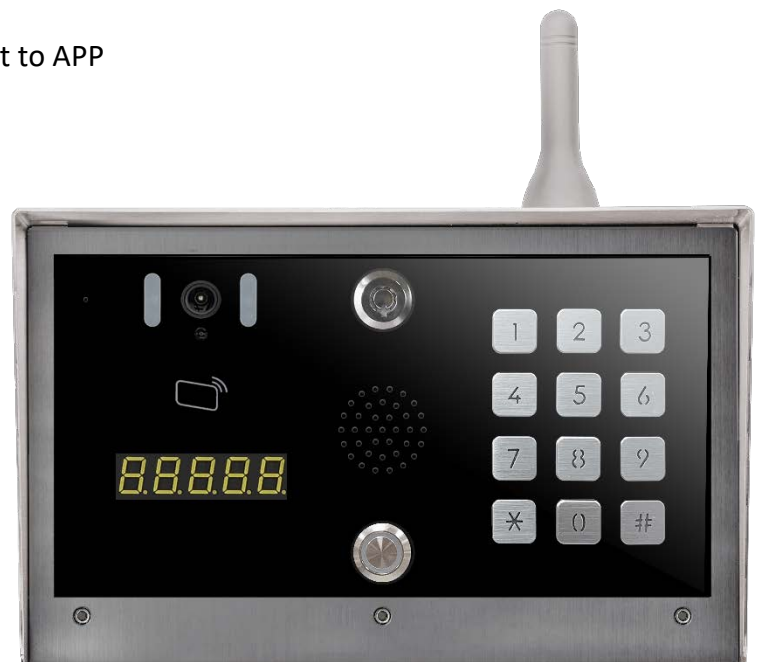

Specifications

Model		SS2012
Video	Image Sensor	1/2.7" 2MP CMOS
	Image Compression	H.265
	Image Frame Rate	25fps maximum
	Resolution	1080P(1920 x 1080), VGA(720 x 576)
	Lens	2.8mm
	Angle of View	H:90° V:80°
	Day Vision	Color Image, auto switch IR-CUT
	Nigh Vision	BW Image, 6 Infrared LED
Audio	Audio Input	Omnidirectional Mic
	Audio Output	Built-in Speaker
	Bidirectional Talk	Dual-way bidirectional talk
	Audio Compression	AMR
Display	Seven-segment display	5 digits
Storage	SD Card Type	Micro SD Card slot
	SD Capacity	Maximum 128 GB
Network	Ethernet	10/100Mbps (PoE optional)
	Mobile network	4G LTE/3G/GSM
Call	Video Call	Android and iOS APP
	Voice Call	Mobile voice call
Door Release	Unlock door	Remotely by APP, voice call DTMF, Pin code, Mifare card
	Relay Outputs	2
	Exit Button input	1
	Detector input	1
	Relay type	NO & NC
	Relay time	1~7 second
	Relay load	120VAC/24VDC/10A
Operation Mode	Keypad	Mechanical Button
	Reader	Type A Mifare Card
Alarm	Face detection	Record 10s video clip
	Notification	Alarm , Warning , Notification
Power	Power Supply	DC 12V-18V 1A
	Power Consumption	10 Watts (Max.)
Environment	Operating Temperature	-10 to +50 °C (+14 to +124 °F)
	Operating Humidity	10~80%RH
	Storage Temperature	-20°C ~ 60° (-4°F ~ 140°F)
	Storage Humidity	0% ~ 90%
General	Reset	Reset button
	SIM Card	Micro SIM Card slot
	Material	Aluminum
	Waterproof	IP54
	Product Dimension	276(L)*116(W)*50(H) mm
	Net Weight	1.5Kg

PMS (Property Management Services):

PMS

Property Console
Video wall
Access Control
Visitor Mgnt.
Alam system

Subscription

User Mgnt.
Application
User Log

Notification

Push message

ASM (Additional Service Module):

Cloud Storage

Video mgnt
Face database



Contact information

Phone: 886-6-3127675

Mail: info@gainwise.com

Website: <https://www.gainwise.com.tw/>

Address: 71069, 10th Floor-4, No. 12, Zhonghua Road,