

Features & Picture:

Features:


- ◆Vehicle (IR Day/Night) Mini Metal Dome Camera
- ◆1/3" SONY Color SuperHAD II Low Lux CCD
- ◆Resolution : 550TVL,650TVL,700TVL
- ◆Lens Optional : 2.5/2.8/3.6/6.0/8.0/12.0mm
- ◆IP67 Water-proof & Vandal-proof housing, resistant to water burst cleaning process
- ◆Angle Adjustment with adaptor 0°, 15°, 25°for optional
- ◆Easy Installation Mechanical Design
- ◆Housing with Spring Washer, easy to turn the ball
- ◆10 leds, vision range 10m(Optional)
- ◆Dimension: D73xH58(mm)




Housing#:CM7A



Housing#:CM7AR

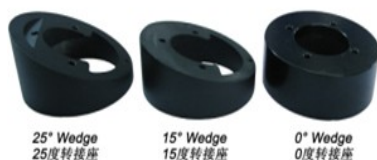

Dimension:

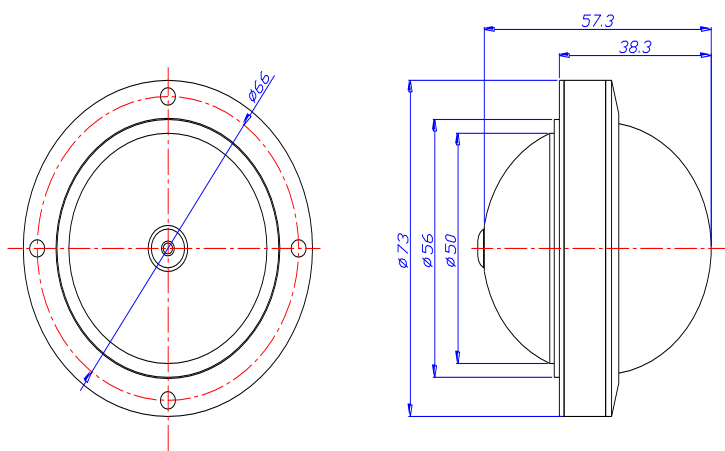

Specifications 技术参数

Model	550ST-CM7A/CM7AR	650SN-CM7A/CM7AR	701SN-CM7A/CM7AR	1200CM-CM7A
Pick up Device	1/3" SONY Color SuperHAD II Low Lux CCD			1/3" SONY CMOS IMX138 Sensor
Signal Format	PAL or NTSC (color)			
Picture Elements	PAL:752(H)x582(V); NTSC:768(H)x494(V)		PAL:976(H)x582(V); NTSC:976(H)x494(V)	PAL:1280(H)x1024(V); NTSC:1280(H)x1024(V)
Horizontal Resolution	550TVL	650TVL	700TVL	1200 TVL(1.31 Mega
Sensitivity	0 Lux(Infrared LED On, at F1.2)-CM7AR / 0.05 Lux at F=1.2-CM7A			0.001 Lux at F=1.2
Infrared LED	10 Leds-CM7AR / N/A-CM7A			
Infrared LED Range	10m-CM7AR / N/A-CM7A			
Scanning System	PAL:625 TVL; NTSC:525TVL 2:1 Interlace			
Synchronization	Internal sync.			
Infrared Spectrum	850nm			
S/N Ratio	Over 50dB(AGC off)			
Auto Gain Control	Auto			
White Balance	Auto			
Electronic Shutter	Auto			
Back Light Compensation	Auto			
Video Output	1 Vp-p,75ΩComposite ,BNCx1			
Audio Output	N/A			
Mirror	Optional			
Gamma Ratio	0.45			
Auto-iris Lens Control	N/A			
Lens	f2.5mm~12mm			
Lens Mount	M12xP0.5mm Thread			
Exterior Focus Adjustment	N/A			
Pan Adjusting	+/-180 Degree			
Tilt Adjusting	0-62 Degree			
Power Supply	12V DC $\pm 10\%$, ϕ 2.0mm DC Jack x1			
Power Consumption	150mA(with Leds) / 70mA(without Leds)			
Dimensions(D x H)	73 x 57.3 mm			
Net Weight	176g			
Weatherproof/Waterproof	Weatherproof (IP67)			
Operating Temperature	-10°C to +50°C			

*Specifications are subject to change without prior notice